

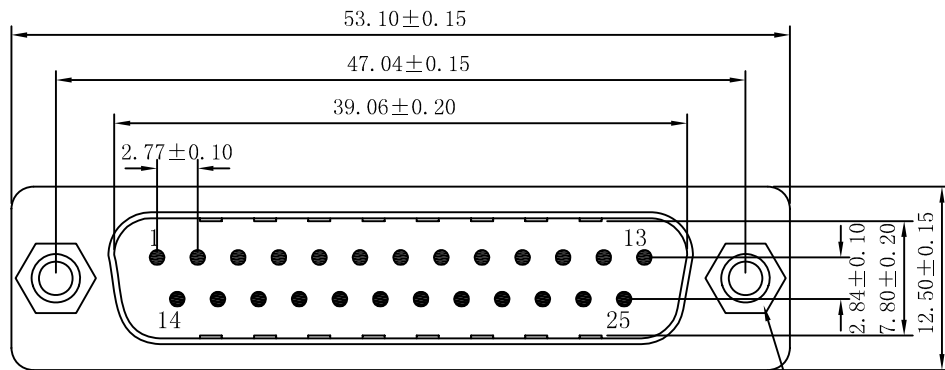


M-2.6X3.3mm  
(THREAD)

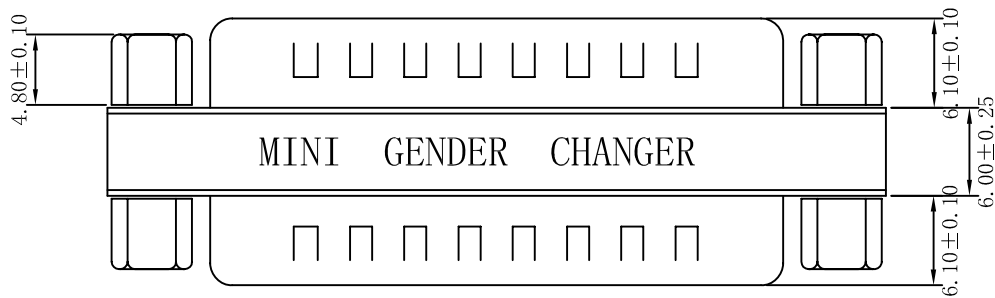


HEXNUTS MUST BE REMOVABLE  
M2.6 NUT (X2)

M-2.6 Hexscrew



M-2.6 Hexnut



DGC 25 M/M GENDER CHANGER

PIN OUT: 25Male

25Male

1	-----	1
2	-----	2
24	-----	24
25	-----	25
G	-----	G

Label: yellow color with black character  
One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell (Nickel Silver)

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000M Ω min at 500V DC

TEMPERATURE: -55°C --- +105°C

NET MECHANISM Corp  
www.cabling-ol.net

SCALE	NONE	
UNIT	MM	
SHEET	1/1	DWG NO.
DATE	02/01/10	
TITLE	DB25 M/M ADAPTER	
PART NO.	DG-25MM-M26	