



HEXNUTS MUST BE REMOVABLE  
#4-40 NUT (X2)

UNC #4-40 Hexscrew


UNC #4-40 Hexnut



DGC 09 F/F GENDER CHANGER

PIN OUT: 9Female

9Female

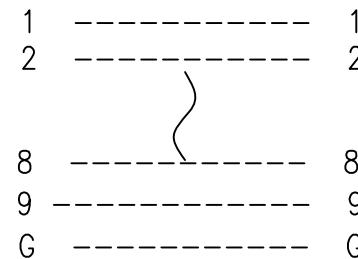

Label: yellow color with black character  
One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C --- +105°C

NET MECHANISM Corp  
www.cabling-ol.net

SCALE	NONE	REV	B
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	02/01/10		

TITLE  
DB9F/DB9F ADAPTER

PART NO.  
DG-9FF-440