



HEXNUTS MUST BE REMOVABLE  
#4-40 NUT (X2)

UNC #4-40 Hexscrew


#4-40 Hexnut



HGCF 15M/F GENDER CHANGER

PIN OUT: 15Male

15Female

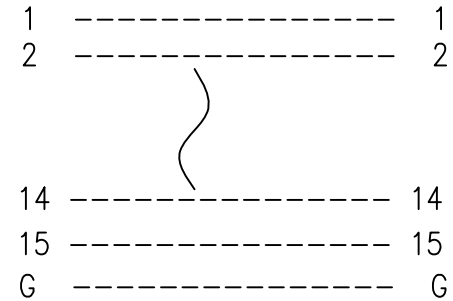

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906

GENDER  
CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C --- +105°C

NET MECHANISM Corp  
www.cabling-ol.net

SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	02/01/10	TITLE	
PART NO.		HDB15M/F ADAPTER	
		DG-H15MF-440	