



UNC #4-40 Hexscrew




UNC #4-40 Hexnut



HGCF 15 M/M GENDER CHANGER

PIN OUT: 15Male

15Male

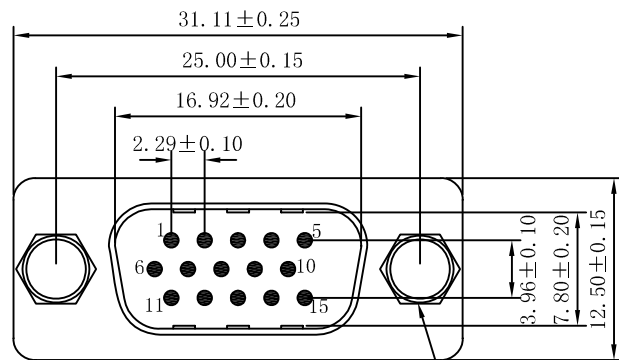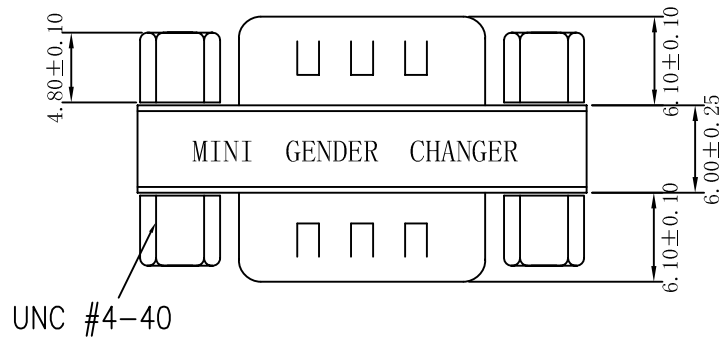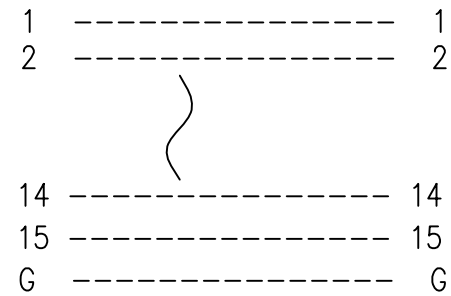

HEXNUTS MUST BE REMOVABLE
#4-40 NUT (X2)

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell (Nickel Silver)

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC FOR ONE Minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C --- +105°C

NET MECHANISM Corp
www.cabling-ol.net

SCALE	NONE		REV	D
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	03/02/12			
TITLE				
HDB15M/M ADAPTER				
PART NO.				
DG-H15MM-440				