


P/N	L(mm)	T(mm)
DIN19F-DVIDM-M10-C	10000	+150/-0
DIN19F-DVIDM-M20-C	20000	+300/-0
DIN19F-DVIDM-M30-C	30000	+300/-0
DIN19F-DVIDM-M45-C	45000	+300/-0

WIRE CONNECTION

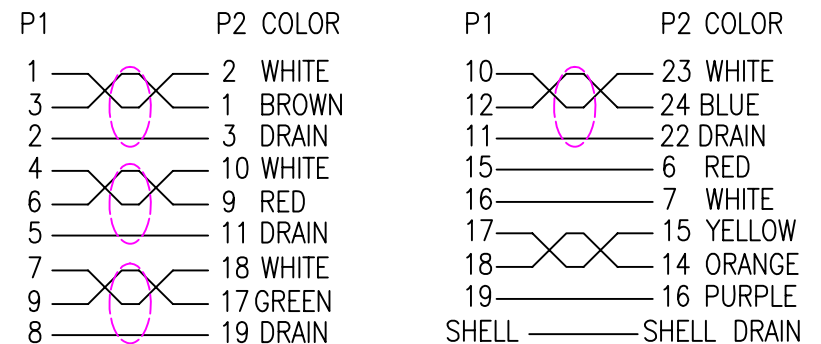

NOTE:

- CABLE: High Speed HDMI® CABLE UL20276 (24AWG*1P+AL+D+MYLAR)*4C +24AWG*1P+24AWG*5C+AL/MY+DRAIN(BARE COPPER)+BRAID(A-M ALLOY), PVC JACKET BLACK OD:9.0±0.15MM.
- CONNECTOR:P1: DIN 19P FEMALE, SOLDER TYPE, TINNED PLATED CONTACTS, INSULATION: BLACK, NICKEL PLATED SHELL, LOCKER TYPE.
P2: DVI-D 18+1 MALE,PIN:G/F,INSULATION BLACK, NICKEL PLATED SHELL.
- SCREW MOLDED BLACK PVC.
- SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE DRAIN.
- P1 MOLDED 45P YELLOW(YL02) PVC,P2 MOLDED 45P BLACK PVC.
- TESTING: 100% ELECTRICAL TEST .
- MOLD P/N: DVI-04, D14F-N01, D14F-02.

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/06/10			
TITLE		DIN 19/F TO DVI-D 18+1M		
PART NO.		DIN19F-DVIDM-MXX-C		