


WIRE CONNECTION

P/N	L(mm)	T(mm)
DIN19F-HDMIM-M10-C	10000	+150/-0
DIN19F-HDMIM-M20-C	20000	+300/-0
DIN19F-HDMIM-M30-C	30000	+300/-0
DIN19F-HDMIM-M45-C	45000	+300/-0

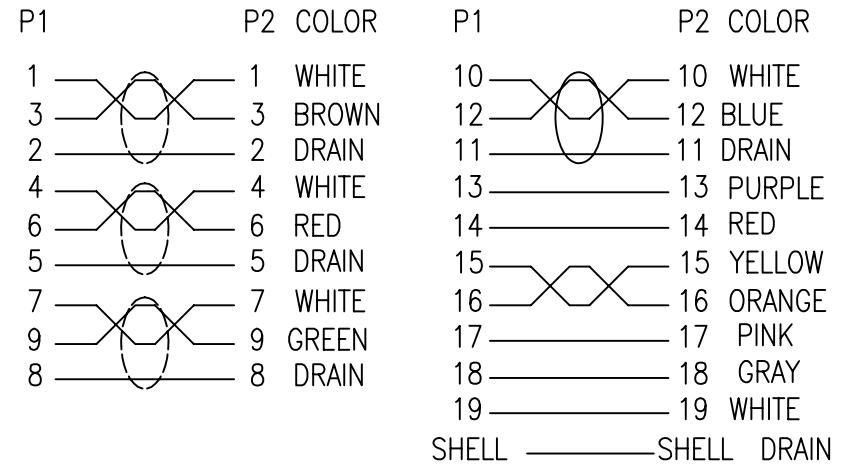

NOTE:

- CABLE: High Speed HDMI® CABLE UL20276 (24AWG*1P+AL+D+MYLAR)*4C +24AWG*1P+24AWG*5C+AL/MY+DRAIN(BARE COPPER)+BRAID(A-M ALLOY), PVC JACKET BLACK OD:9.0±0.15MM.
- CONNECTOR: P1: DIN 19P FEMALE, SOLDER TYPE, TINNED PLATED CONTACTS, INSULATION: BLACK, NICKEL PLATED SHELL,SCREW THREAD TYPE.
P2: HDMI 19P MALE, SOLDER TYPE, GOLD 30U" PLATED CONTACTS, INSULATION: BLACK, GOLD PLATED SHELL. PCB TYPE.
- ALL HOOD: MOLDED 45P PVC.
- SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
- 100% OPEN AND SHORT TESTING.
- MOLD NO: D14F-N01, D14F-02, HDMI-2C-N03,HDMI-2C-03/04

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/06/10			
TITLE	DIN19F TO HDMIM			
PART NO.	DIN19F-HDMIM-MXX-C			