


WIRE CONNECTION

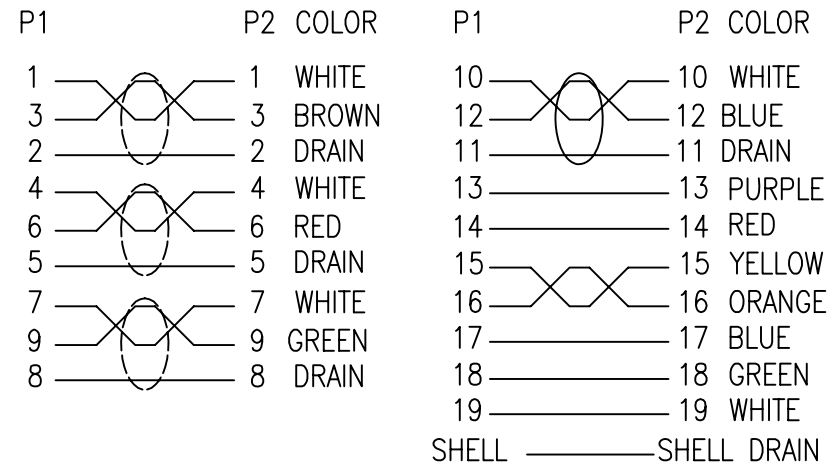

NOTE:

1.CABLE: UL20276 HDMI 1.3(1P*28AWG+DAM)*4C+1P*28AWG+5C* 28AWG+AL/MY+DRAIN(BARE COPPER)+BRAID(A-MALLOY),BLACK PVC JACKET.OD:6.5±0.15MM

2.CONNECTOR: P1: DIN 19P MALE, SOLDER TYPE, TINNED PLATED CONTACTS,INSULATION: BLACK, NICKEL PLATED SHELL, LONG SCREW THREAD TYPE.

P2: HDMI 19P MALE, SOLDER TYPE, GOLD 30U” PLATED CONTACTS, INSULATION: BLACK, GOLD PLATED SHELL. PCB TYPE.

3.ALL HOOD: MOLDED BLACK 45P PVC.

4.SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE DRAIN.

5.100% OPEN AND SHORT TESTING.

6.MOLD NO: D14M-N01, D14M-02, HDMI-N01, HDMI-01.

NET MECHANISM Corp
www.cabling-ol.net

SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	10/18/10			
TITLE	DIN19M TO HDMIM			
PART NO.	DIN19M-HDMIM-M005-C			