


WIRE CONNECTION

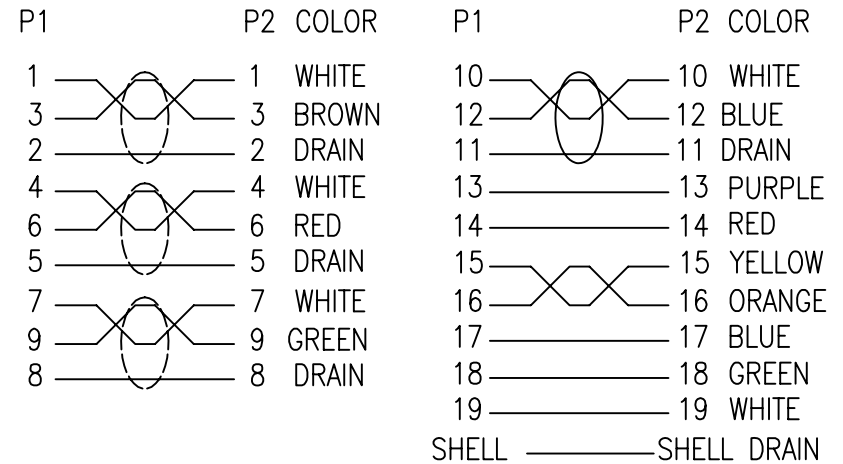

NOTE:

1.CABLE: UL20276 HDMI 1.3(1P*28AWG+DAM)*4C+1P*28AWG+5C*
28AWG+AL/MY+DRAIN(BARE COPPER)+BRAID(A-MALLOY),BLACK
PVC JACKET.OD:6.5±0.15MM

2.CONNECTOR: P1: DIN 19P MALE, SOLDER TYPE, TINNED PLATED
CONTACTS,INSULATION: BLACK, NICKEL PLATED SHELL, LONG
SCREW THREAD TYPE.

P2: HDMI 19P MALE, SOLDER TYPE, GOLD 30U" PLATED CONTACTS,
INSULATION: BLACK, GOLD PLATED SHELL. PCB TYPE.

3.ALL HOOD: MOLDED BLACK 45P PVC.

4.SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360°
SOLDER TO CONNECTOR SHELL AND CABLE DRAIN.

5.100% OPEN AND SHORT TESTING.

6.MOLD NO: D14M-N01, D14M-02, HDMI-N01, HDMI-01.

NET MECHANISM Corp
www.cabling-ol.net

| | | | | |
|----------|---------------------|---------|-----|---|
| SCALE | NONE | | REV | A |
| UNIT | MM | | | |
| SHEET | 1/1 | DWG NO. | | |
| DATE | 10/18/10 | | | |
| TITLE | DIN19M TO HDMIM | | | |
| PART NO. | DIN19M-HDMIM-M005-C | | | |