


WIRE CONNECTION

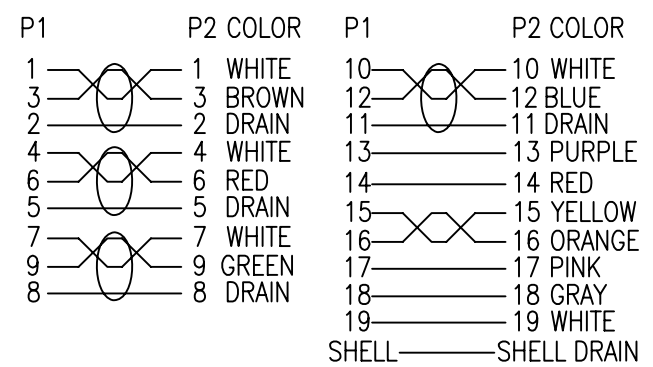

NOTE:

- 1.CABLE: High Speed HDMI® CABLE UL20276 (24AWG\*1P+AL+D+MYLAR)\*4C +24AWG\*1P+24AWG\*5C+AL/MY+DRAIN(BARE COPPER)+BRAID(A-M ALLOY), PVC JACKET BLACK OD:9.0±0.15MM.
- 2.CONNECTOR:P1&P2:HDMI 19P MALE,SOLDER TYPE,GOLD 30U" PLATED CONTACTS, INSULATION:BLACK,GOLD PLATED SHELL.(PCB TYPE)
- 3.ALL HOOD:MOLDED 45P PVC.
- 4.MOLD NO.:HDMI-2C-N03,HDMI-2C-03/04.
- 5.THIS CABLE IS COMPLIANT High Speed HDMI® SPECIFICATION.

P/N	L(M)	L(MM)	T(MM)
DVD-2HDMIHDMI-M07	07	7000	+150/-0
DVD-2HDMIHDMI-M10	10	10000	+150/-0
DVD-2HDMIHDMI-M12	12	12000	+150/-0
DVD-2HDMIHDMI-M15	15	15000	+300/-0
DVD-2HDMIHDMI-M20	20	20000	+300/-0
DVD-2HDMIHDMI-M30	30	30000	+300/-0
DVD-2HDMIHDMI-M45	45	45000	+300/-0

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	E
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/06/10			
TITLE	HDMI19M TO HDMI19M			
PART NO.	DVD-2HDMIHDMI-MXX			