


P/N	XX(FT)	L(MM)	TOLERANCE(MM)
DVD-HDMIDVI-06	06	1829	+75/-0
DVD-HDMIDVI-10	10	3048	+75/-0
DVD-HDMIDVI-15	15	4572	+75/-0
DVD-HDMIDVI-25	25	7620	+150/-0
DVD-HDMIDVI-33	33	10059	+150/-0
DVD-HDMIDVI-50	50	15240	+300/-0

- NOTE:
- CABLE:High Speed HDMI® CABLE UL20276 (28AWG*1P+D-Free-edge-AL)*4C+28AWG*1P+28AWG*5C+AB JACKET COLOR:BLACK OD:7.3±0.15mm.
 - CONNECTOR:P1:HDMI 19P MALE,GOLD 30U” PLATED CONTACTS, INSULATION:BLACK,GOLD PLATED SHELL,PCB TYPE.
P2:DVI 18+1 MALE,PIN:G/F,INSULATION BLACK,GOLD PLATED SHELL.
 - SCREW:#4-40UNC MOLDED BLACK.
 - ALL HOOD:MOLDED BLACK 45P PVC.
 - TEST:100% OPEN AND SHORT TESTING.
 - MOLD NO:OUTER MOLDING:HDMI-01,DVI-01.

WIRE CONNECTION

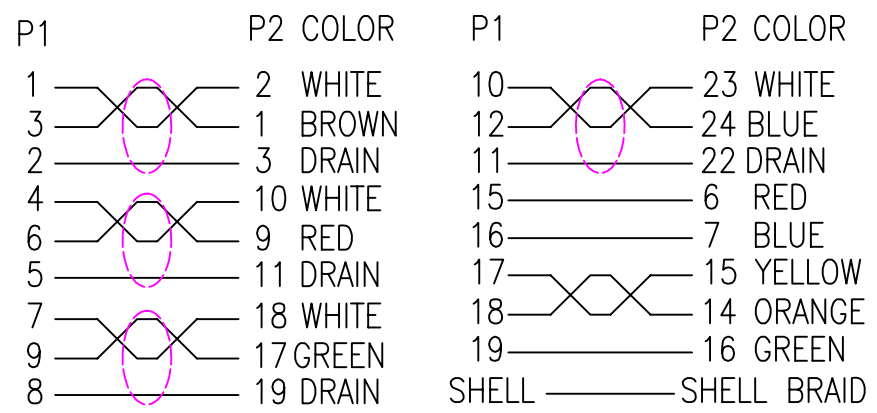

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	C
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/06/10			
TITLE HDMI19P TO DVI18+1 CABLE				
PART NO. DVD-HDMIDVI-XX				