


WIRE CONNECTION

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
DVD-HDMIDVI-06	06	1829	+75/-0
DVD-HDMIDVI-10	10	3048	+75/-0
DVD-HDMIDVI-15	15	4572	+75/-0

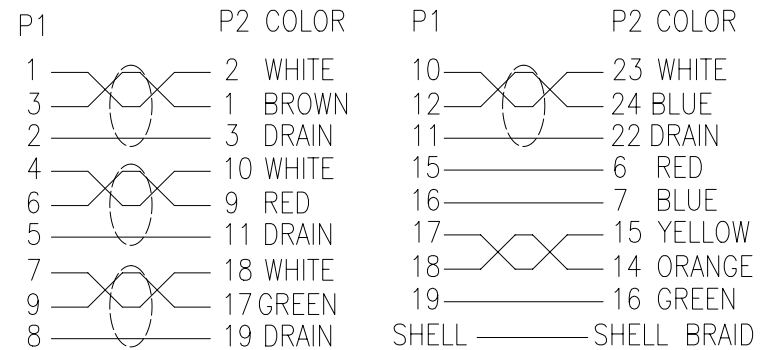

NOTE:

1.CABLE:UL20276 (28AWG*1P+D-Free-edge-AL)*4C+28AWG*1P+28AWG*5C+AB JACKET COLOR:BLACK OD:7.3±0.15mm.

2.CONNECTOR:P1:HDMI 19P MALE,SOLDER TYPE,GOLD 30U" PLATED CONTACTS,INSULATION:BLACK,GOLD PLATED SHELL,PCB TYPE.

P2:DVI 18+1 MALE,PIN:G/F,INSULATION BLACK,GOLD PLATED SHELL.

3.SCREW:#4-40UNC MOLDED BLACK.

4.ALL HOOD:MOLDED BLACK 45P PVC.


5.100% OPEN AND SHORT TESTING:

INSULATION RESISTANCE:10M OHM

CONDUCTOR RESISTANCE:3 OHM

VOLTAGE:DC 300V

6.MOLD NO:OUTER MOLDING:HDMI-01,DVI-01.

NET MECHANISM Corp				
www.cablng-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	03/27/05			
TITLE				
HDMI19P TO DVI18+1 CABLE				
PART NO.				
DVD-HDMIDVI-XX				