


| P/N | XX(FT) | L(MM) | TOLERANCE(MM) |
|----------------|--------|-------|---------------|
| DVD-HDMIDVI-06 | 06 | 1829 | +75/-0 |
| DVD-HDMIDVI-10 | 10 | 3048 | +75/-0 |
| DVD-HDMIDVI-15 | 15 | 4572 | +75/-0 |
| DVD-HDMIDVI-25 | 25 | 7620 | +150/-0 |
| DVD-HDMIDVI-33 | 33 | 10059 | +150/-0 |
| DVD-HDMIDVI-50 | 50 | 15240 | +300/-0 |

WIRE CONNECTION

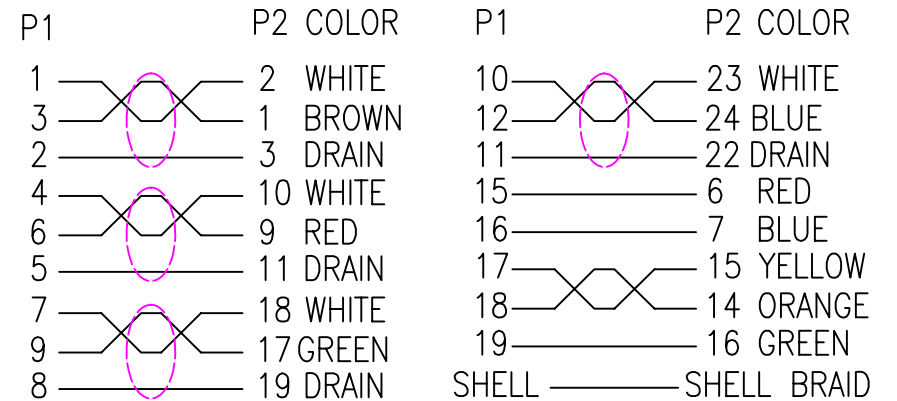

NOTE:

- 1.CABLE:High Speed HDMI® CABLE UL20276 (28AWG*1P+D-Free-edge-AL)*4C+28AWG*1P+28AWG*5C+AB JACKET COLOR:BLACK OD:7.3±0.15mm.
- 2.CONNECTOR:P1:HDMI 19P MALE,GOLD 30U” PLATED CONTACTS, INSULATION:BLACK,GOLD PLATED SHELL,PCB TYPE.
P2:DVI 18+1 MALE,PIN:G/F,INSULATION BLACK,GOLD PLATED SHELL.
- 3.SCREW:#4-40UNC MOLDED BLACK.
- 4.ALL HOOD:MOLDED BLACK 45P PVC.
- 5.TEST:100% OPEN AND SHORT TESTING.
- 6.MOLD NO:OUTER MOLDING:HDMI-01,DVI-01.

NET MECHANISM Corp
www.cabling-ol.net

| | | | | |
|--------------------------|----------|---------|-----|---|
| SCALE | NONE | | REV | C |
| UNIT | MM | | | |
| SHEET | 1/1 | DWG NO. | | |
| DATE | 12/06/10 | | | |
| TITLE | | | | |
| HDMI19P TO DVI18+1 CABLE | | | | |
| PART NO. | | | | |
| DVD-HDMIDVI-XX | | | | |