


WIRE CONNECTION

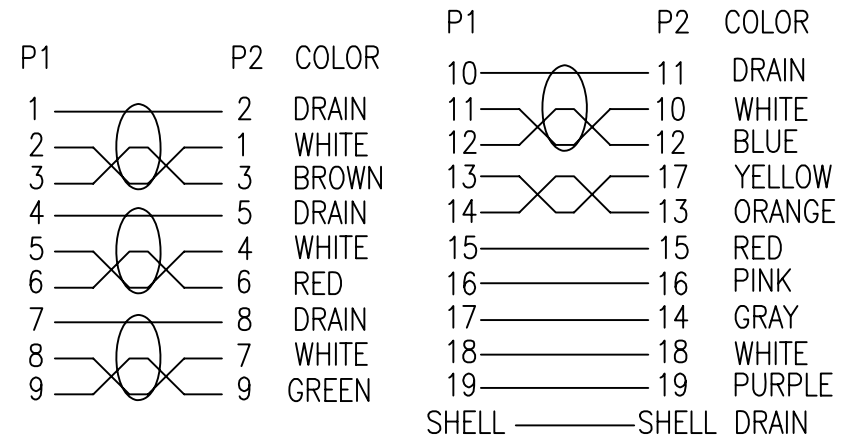

P/N	L(MM)	TOLERANCE(MM)
DVD-MHDMIHDMI-M005	500	+50/-0
DVD-MHDMIHDMI-M01	1000	+75/-0
DVD-MHDMIHDMI-M02	2000	+75/-0
DVD-MHDMIHDMI-M03	3000	+75/-0

NOTE:

1. CABLE:High speed HDMI® CABLE UL20276 (30AWG*1P+D+AL+MYLAR)*4C+ 30AWG*1P+30AWG*5C,AL-FOIL AND BRAID(A-MALLOY)SHIELDED WITH DRAIN WIRE(BARE COPPER),BLACK PVC JACKET, OD:5.5±0.15mm..
2. CONNECTOR:P1:MINI HDMI 19P MALE, GOLD PLATED CONTACTS, INSULATION:BLACK, GOLD PLATED SHELL.
P2:HDMI 19P MALE, GOLD PLATED CONTACTS,INSULATION:BLACK, GOLD PLATED SHELL, PCB TYPE.
3. ALL HOOD:MOLDED BLACK 45P PVC.
4. 100% OPEN AND SHORT TESTING.
5. THIS CABLE IS COMPLIANT High Speed HDMI Cable.
6. MOLD NO.: HDMI-MINI-N01,HDMI-MINI-01;HDMI-N01,HDMI-01.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/03/10			
TITLE	MINI HDMI 19M TO HDMI 19M			
PART NO.	DVD-MHDMIHDMI-MXX			