


PIN OUT

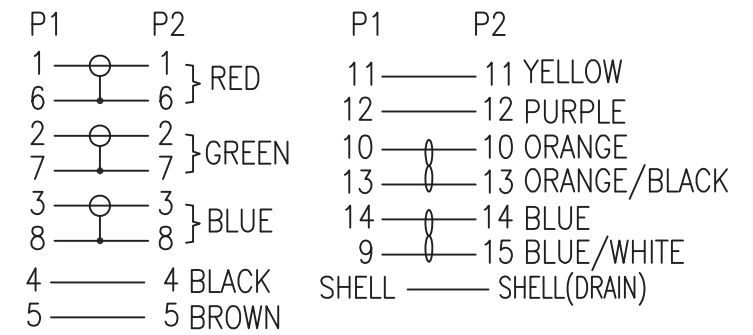

- NOTE:
- CABLE: [(28AWG X 3COAX, EACH COAX SPIRAL SHIELDED, 75Ω, UL1354) + (28AWG X 4C) + (28AWG X 2PAIRS)], AL-FOIL AND BRAID(65% A-MALLOY) SHIELDED WITH DRAIN WIRE(BARE COPPER), UL2919,BLACK PVC JACKET, SLOT  $\phi 9.0 \pm 0.15$ mm.
  - CONNECTOR: P1: DIN 14P FEMALE, NICKEL PLATED CONTACTS AND SHELL, SCREW THREAD TYPE.  
P2: HIGH DENSITY D-SUB 15PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS, 9PIN UNLOADED.NICKEL PLATED SHELL.
  - THUMB SCREW TO BE MOLDED BLACK.
  - SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
  - ALL HOOD: MOLDED BLACK PVC.
  - TESTING: 100% ELECTRICAL TEST .
  - PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.
  - MOLD NO.: D14F-N01, D14F-02, HD15-N01,HD15-01,02,03.

|  |          |                      |     |   |
|--|----------|----------------------|-----|---|
| NET MECHANISM Corp<br>www.cabling-ol.net |          |                      |     |   |
| SCALE                                    | NONE     |                      | REV | A |
| UNIT                                     | MM       |                      |     |   |
| SHEET                                    | 1/1      | DWG NO.              |     |   |
| DATE                                     | 11/30/10 |                      |     |   |
| TITLE                                    |          | DIN 14/F TO HDB 15/M |     |   |
| PART NO.                                 |          | EDIS-HD15MDIN14F-MXX |     |   |