

NOTE:

1. CABLE: [(28AWG X 3COAX, EACH COAX SPIRAL SHIELDED, 75Ω, UL1354) + (28AWG X 4C) + (28AWG X 2PAIRS)], AL-FOIL AND BRAID(65% A-MALLOY) SHIELDED WITH DRAIN WIRE(BARE COPPER), UL2919,BLACK PVC JACKET, SLOT $\phi 9.0 \pm 0.15\text{mm}$.
2. CONNECTOR: P1: HDB 15PIN FEMALE: SOLDER TYPE WITH HEX NUT, GOLD FLASH CONTACTS; INSULATION COLOR:BLACK.
P2: HDB 15PIN MALE NON-PIN #9: SOLDER TYPE, GOLD FLASH CONTACTS; INSULATION COLOR:BLACK.


③ THUMB SCREW TO BE MOLDED BLACK.

4. SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE DRAIN.

5. ALL HOOD: MOLDED BLACK PVC.

6. TESTING: 100% ELECTRICAL TESTING.

PIN OUT

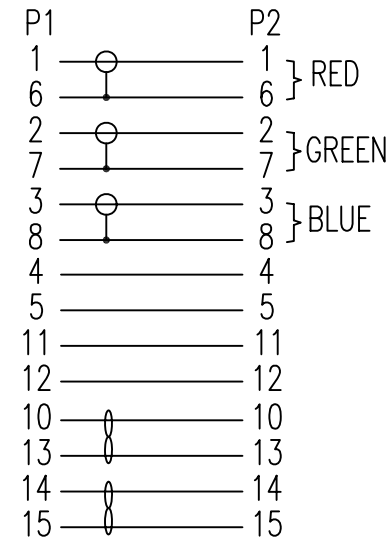

SHELL ————— SHELL




CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
EDIS-HD15MF-06NU	06	1829	+75/-0
EDIS-HD15MF-10NU	10	3048	+75/-0
EDIS-HD15MF-15NU	15	4572	+75/-0

NET MECHANISM Corp
www.cabling-ol.net

SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	04/24/12			
TITLE	HDB15M TO HDB15F			
PART NO.	EDIS-HD15MF-XXNU			