

NOTE:

1. CABLE: [(28AWG X 3COAX, EACH COAX SPIRAL SHIELDED, 75Ω, UL1354) + (28AWG X 4C) + (28AWG X 2PAIRS)], AL-FOIL AND BRAID(65% A-MALLOY) SHIELDED WITH DRAIN WIRE(BARE COPPER), UL2919,BLACK PVC JACKET, SLOT $\varnothing 9.0 \pm 0.15\text{mm}$.
2. CONNECTOR: P1 & P2: HIGH DENSITY D-SUB 15PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS,9PIN UNLOADED.
3. THUMB SCREW TO BE MOLDED BLACK.
4. LABEL (WHITE BACKGROUND WITH BLACK LETTERS) TO BE COVERED WITH A CLEAR TAPE.
5. SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE DRAIN.
6. ALL HOOD: MOLDED BLACK PVC.
7. TESTING: 100% ELECTRICAL TESTING.
8. MOLD NO.: HD15-01.

PIN OUT


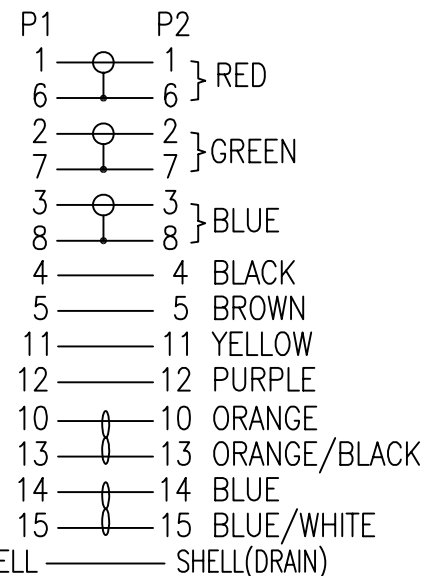


CHART:

P/N	XXX(FT)	L(MM)	TOLERANCE(MM)
EDIS-HD15MM-003	003	914	+50/-0
EDIS-HD15MM-006	006	1829	+75/-0
EDIS-HD15MM-010	010	3048	+75/-0
EDIS-HD15MM-015	015	4572	+75/-0
EDIS-HD15MM-025	025	7620	+150/-0
EDIS-HD15MM-033	033	10000	+150/-0
EDIS-HD15MM-050	050	15240	+300/-0
EDIS-HD15MM-075	075	22860	+300/-0
EDIS-HD15MM-100	100	30480	+300/-0
EDIS-HD15MM-130	130	39624	+300/-0
EDIS-HD15MM-165	165	50292	+500/-0

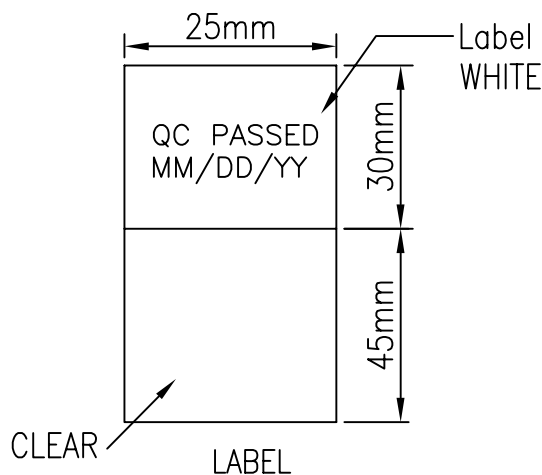

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	11/30/10			
TITLE	HD15M TO HD15M			
PART NO.	EDIS-HD15MM-XXX			