


P/N	X(FT)	L(MM)	TOLERANCE(MM)
EDIS-SHD15MM-03	3	914	+50/-0
EDIS-SHD15MM-06	6	1829	+75/-0
EDIS-SHD15MM-10	10	3048	+75/-0
EDIS-SHD15MM-15	15	4572	+75/-0

NOTE:

- MINI R.G.B CABLE: [(32AWG X 3COAX, EACH COAX SPIRAL SHIELDED) + (30AWG X 5C)+(30AWG X 2PAIRS)], AL-FOIL AND BRAID(85% min) SHIELDED WITH DRAIN WIRE, UL20276, BEIGE(BG-02) PVC JACKET,  $\phi 5.0 \pm 0.15$ mm.
- CONNECTOR: P1,P2: HIGH DENSITY D-SUB 15PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS, 9PIN UNLOADED,PBT BLACK.
- THUMB SCREW TO MOLDED ABS BEIGE(BG-02) #4-40UNC 4.0\*H40.5mm.
- SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
- ALL HOOD: MOLDED BEIGE(BG-02) PVC.
- TESTING: 100% ELECTRICAL TEST.

PIN OUT

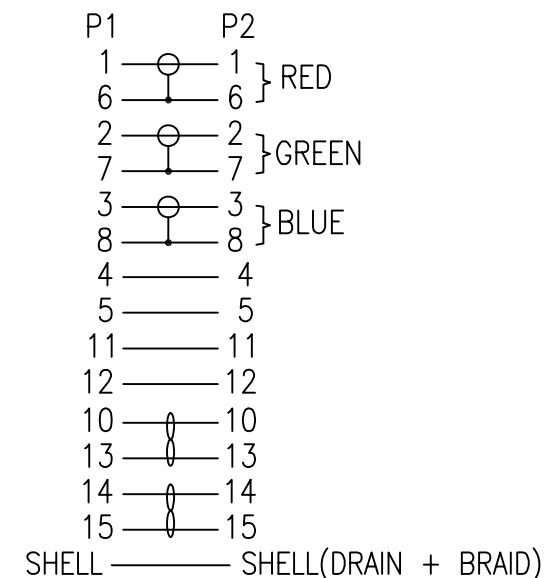

NET MECHANISM Corp  
www.cabling-ol.net

SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	05/14/09			
TITLE				
HDB 15M TO HDB15M				
PART NO.				
EDIS-SHD15MM-XX				