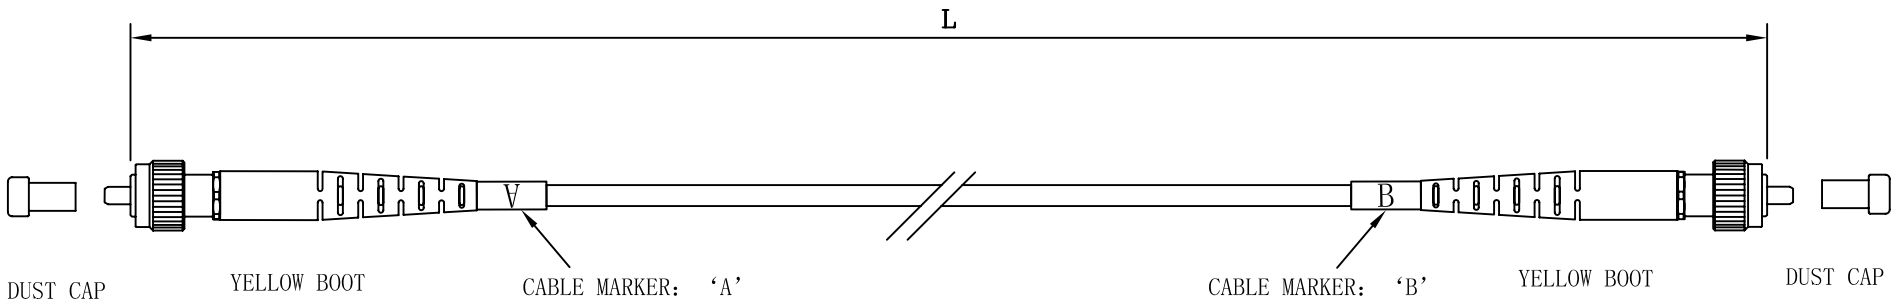

A

B

L(mm)	TOLERANCE(mm)
100~499	+15/−0
500~999	+50/−0
1000~4999	+75/−0
5000~14999	+150/−0
15000~49999	+300/−0
50000~100000	+500/−0

Specification:

1. Connector A	FC/PC S/M BOOT:YELLOW
2. Connector B	FC/PC S/M BOOT:YELLOW
3. Cable Type	Simplex S/M 9/125uM ⌀2.8mm
4. Length	METER
5. Jacket Color	YELLOW.
6. Insertion Loss	<0.20 dB
7. Return Loss	>50.0 dB.

NET MECHANISM Corp www.cabling-ol.net			
SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	1/24/08		
TITLE	FC-FC Simplex SM Fiber Patchcords		
PART NO.	FC-FC-SMX-SP		