


PIN OUT:

P/N	X(M)	L(MM)	TOLERANCE(MM)
FCN24SS-F0025	0.25	250	+25/-0
FCN24SS-F0050	0.5	500	+25/-0
FCN24SS-F0075	0.75	750	+25/-0
FCN24SS-F0100	1	1000	+25/-0
FCN24SS-F0150	1.5	1500	+50/-0
FCN24SS-F0200	2	2000	+50/-0
FCN24SS-F0300	3	3000	+50/-0

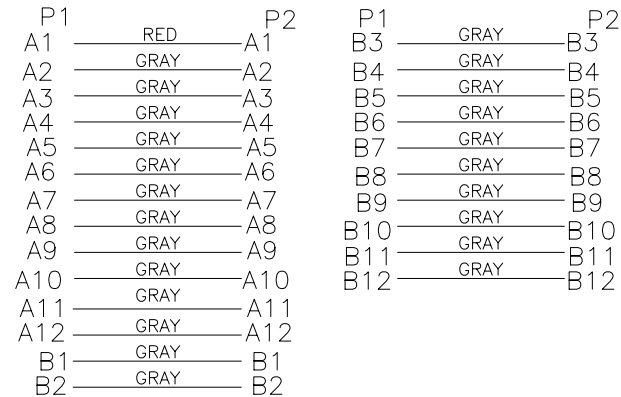

REMARK

- 1.CABLE:UL 2651 28AWG(7/0.127)*24C,105°C 300V,COLOR:GRAY.
- 2.P1&P2 CONN.:FUJITSU P/N:FCN-367J024-AU-F.
- 3.THE CABLE SHALL BE 100% ELECTRICAL TEST.

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	11/13/04			
TITLE		FCN 24P FEMALE IDC TYPE		
PART NO.		FCN24SS-FXXXX		