


P/N	X(M)	L(MM)	TOLERANCE(MM)
HPCN14PP-M0050	0.5	500	+50/-0
HPCN14PP-M0100	1	1000	+75/-0
HPCN14PP-M0150	1.5	1500	+75/-0
HPCN14PP-M0200	2	2000	+75/-0
HPCN14PP-M0300	3	3000	+75/-0
HPCN14PP-M0500	5	5000	+150/-0

PIN OUT:

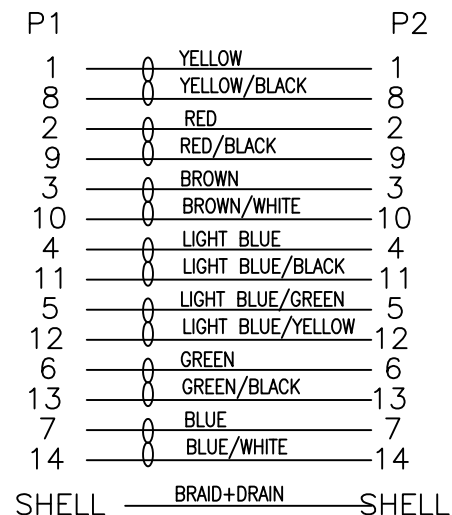

NOTE:

- CABLE: 28AWG X 7PAIRS(INSULATION: P.P, CONDUCTOR OD= $\phi 0.62 \pm 0.05$ mm),AL-FOIL AND BRAID,SHIELDED WITH DRAIN WIRE,UL20276 (IEEE 1284),BEIGE(BG02) PVC JACKET, MARKING ON PVC JACKET INCLUDE "IEEE 1284-1994 COMPLIANT" ALONG ITS LENGTH. OD= $5.5 \pm 0.15$
- CONNECTOR: P1 & P2: HALF PITCH 14PIN CENTRONICS MALE: RIBBON AND IDC ASSY TYPE, GOLD PLATED CONTACTS, W/ABS HOOD.
- PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.

NET MECHANISM Corp www.cabling-ol.net					
SCALE	NONE		REV	B	
UNIT	MM				
SHEET	1/1	DWG NO.			
DATE	11/01/13				
TITLE HPCN14M TO HPCN14M					
PART NO. HPCN14PP-MXXXX					