
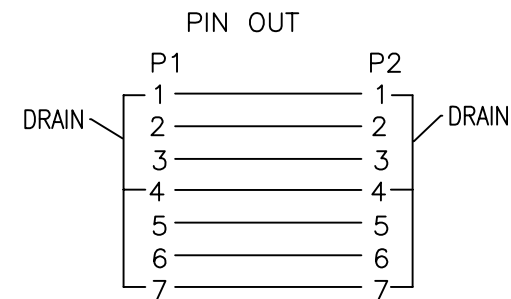


P/N	XX(INCH)	L(MM)	TOLERANCE(MM)
LSATA-LLR-18	18	457	+15/-0
LSATA-LLR-36	36	914	+50/-0



NOTES:

1. CABLE: SERIAL ATA CABLE:{26AWG(1/0.404)*2C+AL.MY+ DRAIN WIRE[28AWG(1/0.32)*2C]}*2F,OD:2.3*8.30mm RED PVC JACKET.
2. CONNECTOR: P1&P2:SERIAL ATA 7PIN PLUG,CRIMPING TYPE, GOLD PLATED CONTACTS, WITH LATCH.
3. HOOD: MOLDED BLACK PVC.
4. TEST: 100% ELECTRICAL TEST.
5. MOLD NO.:SATA-07.

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	10/31/07			
TITLE				
SATA 7P TO SATA 7P (90°)				
PART NO.				
LSATA-LLR-XX				