


| P/N | XX(INCH) | L(MM) | TOLERANCE(MM) |
|---------------|----------|-------|---------------|
| LSATA-STLR-18 | 18 | 457 | +15/-0 |
| LSATA-STLR-36 | 36 | 914 | +50/-0 |

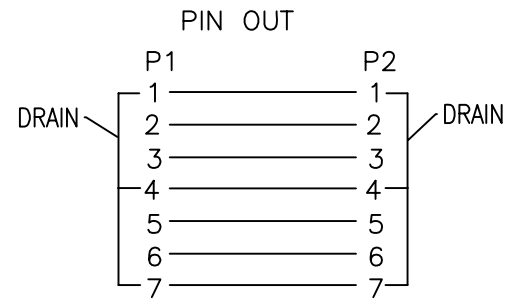

NOTES:

- CABLE: SERIAL ATA CABLE:{26AWG(1/0.404)*2C+AL.MY+ DRAIN WIRE[28AWG(1/0.32)*2C]}*2F,OD:2.3*8.30mm RED PVC JACKET.
- CONNECTOR: P1&P2:SERIAL ATA 7PIN PLUG,CRIMPING TYPE, GOLD PLATED CONTACTS,WITH LATCH.
- HOOD: MOLDED BLACK PVC.
- TEST: 100% ELECTRICAL TEST.
- MOLD NO.:SATA-05,SATA-07.

| | | | | |
|--|----------|---------|-----|---|
| NET MECHANISM Corp | | | | |
| www.cabling-ol.net | | | | |
| SCALE | NONE | | REV | A |
| UNIT | MM | | | |
| SHEET | 1/1 | DWG NO. | | |
| DATE | 10/31/07 | | | |
| TITLE SATA 7P(180°) TO SATA 7P(90°) | | | | |
| PART NO. LSATA-STLR-XX | | | | |