

NOTE:

1. CABLE: 28AWG X 5P, AL-FOIL SHIELDED WITH DRAIN WIRE AND BRAID, UL2464, BEIGE (BG-02) PVC JACKET. OD:6.0mm.
2. CONNECTOR: P1: MINI DIN 6PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS; INSULATION BLACK PBT,SHELL NICKEL PLATED SHORT COPPER DUCT.  
P2: MINI DIN 6PIN FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS. INSULATION BLACK PBT,SHELL NICKEL PLATED SHORT COPPER DUCT.
3. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
4. ALL HOOD: MOLDED BEIGE(BG-02) PVC.
5. TESTING:100% ELECTRICAL TESTING.
6. MOLD P/N:MD6M-01,MD6M-N01;MD6F-01,MD6F-N01

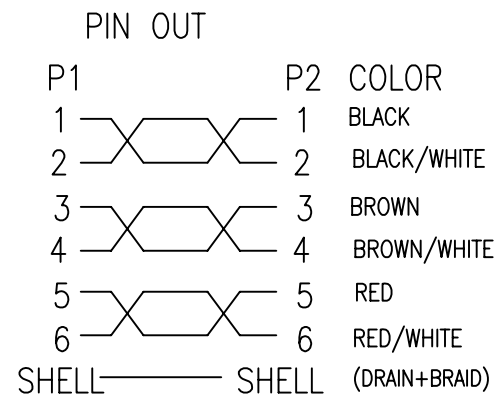


CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
ME-MD6MF-03	03	914	+50/-0
ME-MD6MF-06	06	1829	+75/-0
ME-MD6MF-10	10	3048	+75/-0
ME-MD6MF-15	15	4572	+75/-0

NET MECHANISM Corp www.cabling-ol.net			
SCALE	NONE		REV
UNIT	MM		B
SHEET	1/1	DWG NO.	
DATE	06/13/06		
TITLE	MD6M TO MD6F		
PART NO.	ME-MD6MF-XX		