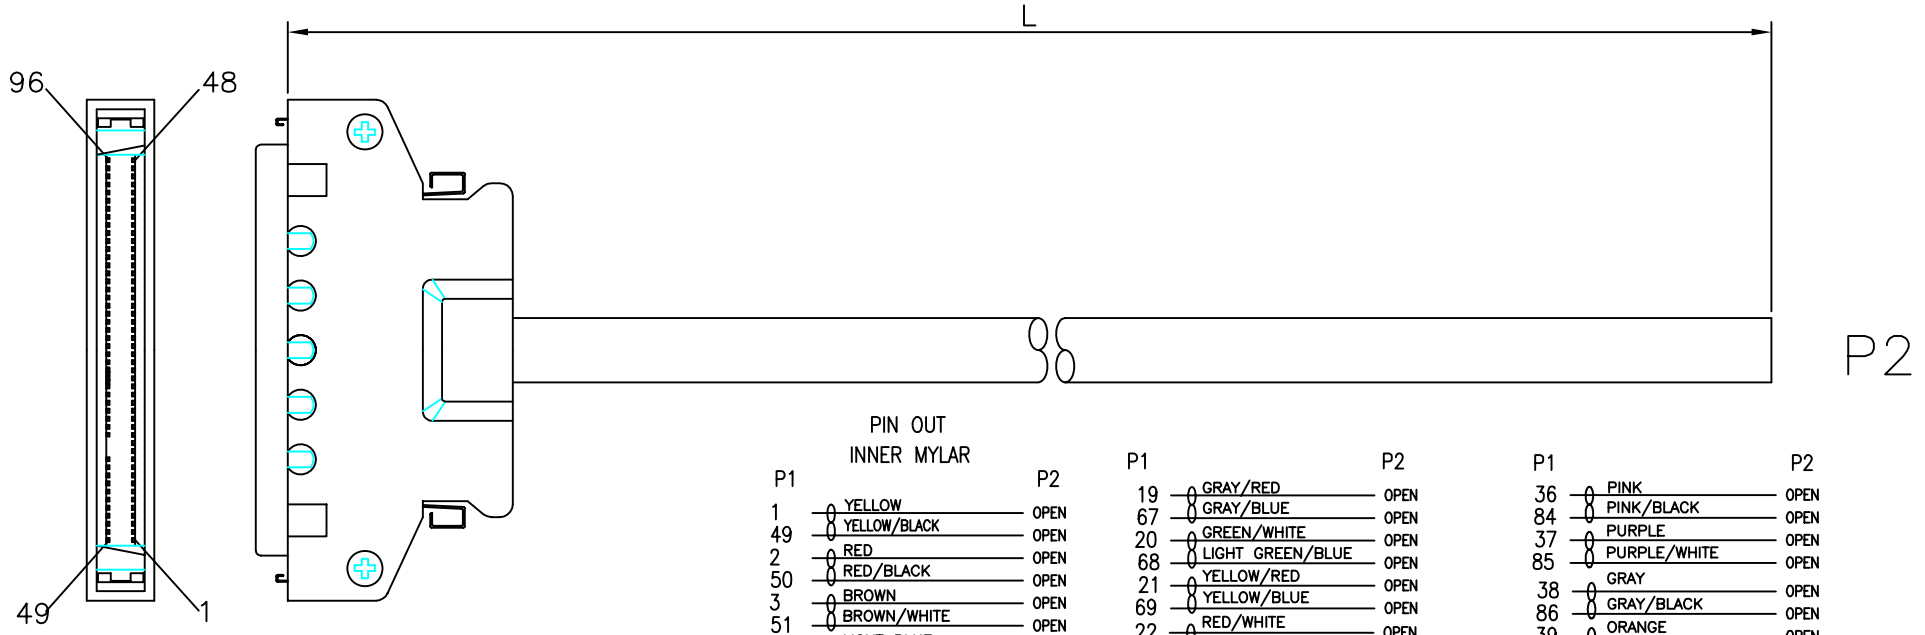

P/N	X(M)	L(MM)	TOLERANCE(MM)
PCR96S-M0050	0.5	500	+25/-0
PCR96S-M0100	1	1000	+25/-0
PCR96S-M0150	1.5	1500	+50/-0
PCR96S-M0200	2	2000	+50/-0
PCR96S-M0300	3	3000	+50/-0
PCR96S-M0500	5	5000	+50/-0

PIN OUT

INNER MYLAR

P1		P2
1	YELLOW	OPEN
49	YELLOW/BLACK	OPEN
2	RED	OPEN
50	RED/BLACK	OPEN
3	BROWN	OPEN
51	BROWN/WHITE	OPEN
4	LIGHT BLUE	OPEN
52	LIGHT BLUE/BLACK	OPEN
5	LIGHT BLUE/GREEN	OPEN
53	LIGHT BLUE/YELLOW	OPEN
6	GREEN	OPEN
54	GREEN/BLACK	OPEN
7	BLUE	OPEN
55	BLUE/WHITE	OPEN
8	WHITE	OPEN
56	WHITE/BLACK	OPEN
9	PINK	OPEN
57	PINK/BLACK	OPEN
10	PURPLE	OPEN
58	PURPLE/WHITE	OPEN
11	GRAY	OPEN
59	GRAY/BLACK	OPEN
12	ORANGE	OPEN
60	ORANGE/BLACK	OPEN
13	PINK/WHITE	OPEN
61	PINK/YELLOW	OPEN
14	GRAY/GREEN	OPEN
62	GRAY/YELLOW	OPEN
15	WHITE/YELLOW	OPEN
63	WHITE/GREEN	OPEN
16	LIGHT GREEN/RED	OPEN
64	GREEN/BLUE	OPEN
17	LIGHT BLUE/BLUE	OPEN
65	LIGHT BLUE/RED	OPEN
18	PINK/ RED	OPEN
66	PINK/BLUE	OPEN

P1		P2
19	GRAY/RED	OPEN
67	GRAY/BLUE	OPEN
20	GREEN/WHITE	OPEN
68	LIGHT GREEN/BLUE	OPEN
21	YELLOW/RED	OPEN
69	YELLOW/BLUE	OPEN
22	RED/WHITE	OPEN
70	RED/BLUE	OPEN
23	WHITE/RED	OPEN
71	WHITE/BLUE	OPEN
24	LIGHT GRENN	OPEN
72	LIGHT GREEN/BLACK	OPEN
25	LIGHT GREEN/YELLOW	OPEN
73	LIGHT GREEN/GREEN	OPEN
26	ORANGE/WHITE	OPEN
74	GRAY/WHITE	OPEN
27	ORANGE/GREEN	OPEN
75	ORANGE/RED	OPEN

OUTER MYLAR

28	YELLOW	OPEN
76	YELLOW/BLACK	OPEN
29	RED	OPEN
77	RED/BLACK	OPEN
30	BROWN	OPEN
78	BROWN/WHITE	OPEN
31	LIGHT BLUE	OPEN
79	LIGHT BLUE/BLACK	OPEN
32	LIGHT BLUE/GREEN	OPEN
80	LIGHT BLUE/YELLOW	OPEN
33	GREEN	OPEN
81	GREEN/BLACK	OPEN
34	BLUE	OPEN
82	BLUE/WHITE	OPEN
35	WHITE	OPEN
83	WHITE/BLACK	OPEN

P1		P2
36	PINK	OPEN
84	PINK/BLACK	OPEN
37	PURPLE	OPEN
85	PURPLE/WHITE	OPEN
38	GRAY	OPEN
86	GRAY/BLACK	OPEN
39	ORANGE	OPEN
87	ORANGE/BLACK	OPEN
40	PINK/WHITE	OPEN
88	PINK/YELLOW	OPEN
41	GRAY/GREEN	OPEN
89	GRAY/YELLOW	OPEN
42	WHITE/YELLOW	OPEN
90	WHITE/GREEN	OPEN
43	LIGHT GREEN/RED	OPEN
91	GREEN/BLUE	OPEN
44	LIGHT BLUE/BLUE	OPEN
92	LIGHT BLUE/RED	OPEN
45	PINK/ RED	OPEN
93	PINK/BLUE	OPEN
46	GRAY/RED	OPEN
94	GRAY/BLUE	OPEN
47	GREEN/WHITE	OPEN
95	LIGHT GREEN/BLUE	OPEN
48	YELLOW/RED	OPEN
96	YELLOW/BLUE	OPEN
GND	BRAID+DRAIN	OPEN

>1 PAIR

NOTE:

1. CABLE: UL20276 (27P*28AWG+MYLAR)+21P*28AWG+AL.MYLAR+DRAIN+BRAID
   OD=10.8±0.2MM
2. CONNECTOR: P1:HONDA P/N: PCR-E96FA, IDC TYPE.
3. SHELL:P1: HONDA P/N: PCS-E96LKPA.
4. TESTING: 100% ELECTRICAL TEST

NET MECHANISM Corp
www.cabling-ol.net

SCALE	NONE	REV	B
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	10/04/06		

TITLE: PCR 96PIN FEMALE IDC TYPE/OPEN

PART NO. PCR96S-MXXXX