

NOTE:

1. CABLE: 28AWG X 36C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE (BG-03) PVC JACKET.
2. CONNECTOR: P1: CENTRONICS 36PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS; P2: CENTRONICS 36PIN FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS.
3. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
4. ALL HOOD: MOLDED BEIGE(BG-03) PVC.
5. TESTING:100% ELECTRICAL TESTING.

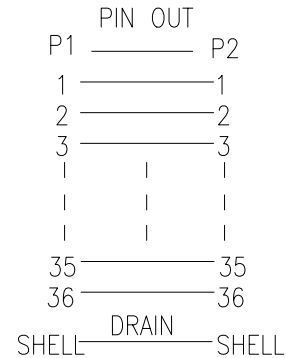


CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
PR5-36M36F-06	06	1829	+75/-0
PR5-36M36F-10	10	3048	+75/-0
PR5-36M36F-15	15	4572	+75/-0

NET MECHANISM Corp www.cabling-ol.net			
SCALE	NONE		REV A
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	11/13/04		
TITLE		CN36M TO CN36F	
PART NO.		PR5-36M36F-XX	