

NOTE:

1. CABLE: 28AWG X 36C, AL-FOIL SHIELDED WITH DRAIN WIRE, NON-UL, BEIGE (BG-03) PVC JACKET $\varnothing 8.5 \pm 0.15$ mm.
2. CONNECTOR: P1 & P2: CENTRONICS 36PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS.
3. SHIELDING: AL-FOIL TAPE COVER PREMOLD AND 100% CONTACT WITH SHELL.
4. ALL HOOD: MOLDED BEIGE(BG-03) PVC.
5. TESTING:100% ELECTRICAL TESTING.

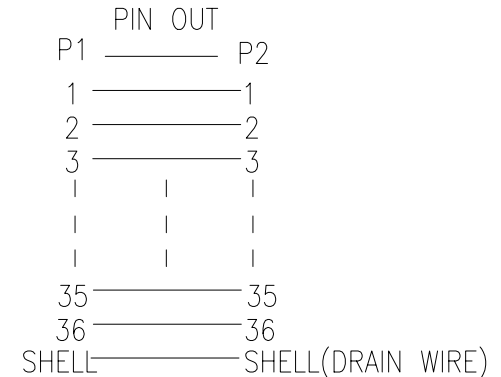


CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
PR5-36M36M-03	03	914	+50/-0
PR5-36M36M-06	06	1829	+75/-0
PR5-36M36M-10	10	3048	+75/-0
PR5-36M36M-15	15	4572	+75/-0

NET MECHANISM Corp www.cabling-ol.net			
SCALE	NONE		REV A
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	11/13/04	TITLE	
		CN36M TO CN36M	
PART NO.		PR5-36M36M-XX	