


CHART:


P/N	X(M)	L(MM)	TOLERANCE(MM)
RJ11-66-F0100	1	1000	+75/-0
RJ11-66-F0300	3	3000	+75/-0
RJ11-66-F0500	5	5000	+150/-0
RJ11-66-F1000	10	10000	+150/-0
RJ11-66-F2000	20	20000	+300/-0

PIN OUT

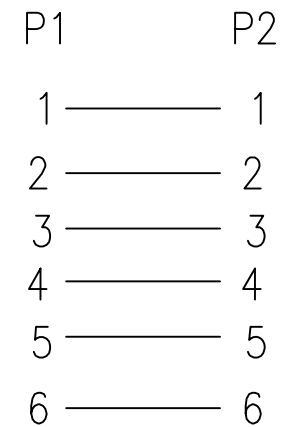

NOTE:

1. CABLE: UL20251 26AWG*6C,JACKET:GREY PVC.
2. CONNECTOR: P1&P2: RJ11 6P6C MOUPLAR PLUG,PLATED GOLD 6U”.
3. CABLE ASS’Y MUST PASS CONTINUITY TEST.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	10/31/07			
TITLE RJ11 6P6C TO RJ11 6P6C FLAT CABLE				
PART NO. RJ11-66-FXXXX				