


P/N	XX(INCH)	L(MM)	TOLERANCE(MM)
SATA-LLR-18	18	457	+15/-0
SATA-LLR-36	36	914	+50/-0

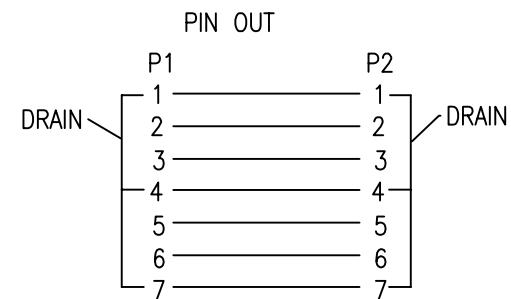

NOTES:

1. CABLE: SERIAL ATA CABLE: {26AWG(1/0.404)*2C+AL.MY+ DRAIN WIRE [28AWG(1/0.32)*2C]}*2F, OD: 2.3*8.30mm RED PVC JACKET.
2. CONNECTOR: P1 & P2: SERIAL ATA 7PIN PLUG, CRIMPING TYPE, GOLD PLATED CONTACTS.
3. HOOD: MOLDED BLACK PVC.
4. TEST: 100% ELECTRICAL TEST.
5. MOLD NO.: SATA-05.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	09/26/07			
TITLE SATA 7P TO SATA 7P (90°)				
PART NO. SATA-LLR-XX				