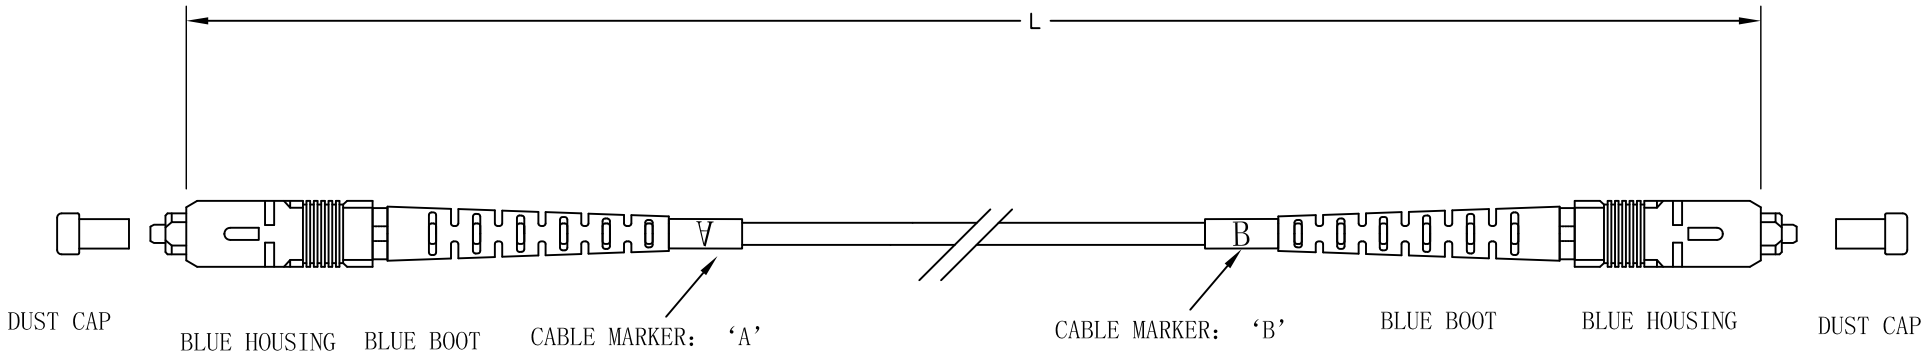

L(mm)	TOLERANCE(mm)
100~499	+25/-0
500~999	+50/-0
1000~4999	+75/-0
5000~14999	+150/-0
15000~49999	+300/-0
50000~100000	+500/-0

Specification:

1. Connector A	SC/PC S/M BOOT:BLUE
2. Connector B	SC/PC S/M BOOT:BLUE
3. Cable Type	Simplex S/M 9/125uM Ø2.8mm
4. Length	METER
5. Jacket Color	YELLOW.
6. Insertion Loss	<0.20 dB
7. Return Loss	>50.0 dB.

NET MECHANISM Corp www.cabling-ol.net			
SCALE	NONE	REV	B
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	11/25/13		
TITLE	SC-SC Simplex SM Fiber Patchcords		
PART NO.	SC-SC-SMX-SP		