



P/N	XX(FT)	L(MM)	TOLERANCE(MM)
USB2-AMAM-03	03	914	+50/-0
USB2-AMAM-06	06	1829	+75/-0
USB2-AMAM-10	10	3048	+75/-0
USB2-AMAM-15	15	4572	+75/-0

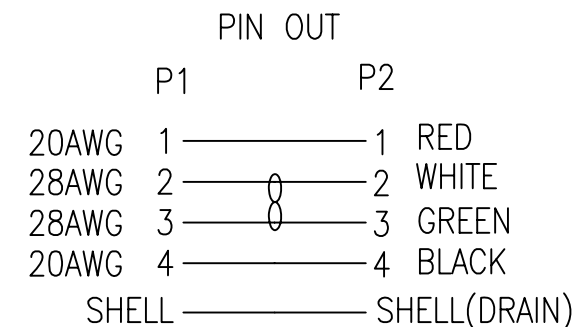

NOTES:

1. CABLE: UL2725 USB 2.0 REV CABLE.(28AWG*1PAIR+ 20AWG*2C),AL-FOIL AND BRAID SHIELDED(A-MALLOY) WITH A DRAIN WIRE(BARE COPPER),PVC JACKET BLACK OD:4.8±0.15MM.
2. CONNECTOR: USB A TYPE MALE, WHITE PBT INSULATION, GOLD PLATED CONTACTS, GOLD PLATED SHELL.
3. HOOD: MOLDED 45P PVC BLACK(BK) PVC.
4. PACKING:EACH CABLE IN A ZIP-LOCK POLY-BAG.
5. 100% ELECTRICAL TESTING.
6. MOLDED NO:USB-AM01.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/20/10			
TITLE USB AM TO USB AM				
PART NO. USB2-AMAM-XX				