



P/N	XX(FT)	L(MM)	TOLERANCE(MM)
USB2-AMMBMG-03	03	914	+50/-0
USB2-AMMBMG-06	06	1829	+75/-0
USB2-AMMBMG-10	10	3048	+75/-0
USB2-AMMBMG-15	15	4572	+75/-0

PIN OUT :

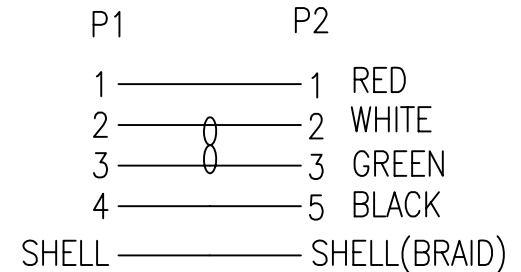

NOTES:

- CABLE: UL2725 2.0 REV 28AWG*1PAIR+28AWGX2C,AL/MY+BRAID+DRAIN(28AWG), BLACK(BK) PVC JACKET, OD:0.15±0.004”(3.8±0.1mm).
- CONNECTOR: P1: USB A TYPE MALE, WHITE PBT INSULATION, GOLD PLATED CONTACTS, GOLD PLATED SHELL.
P2: MINI USB 2.0 REV B TYPE 5P MALE, PBT INSULATION, GOLD PLATED CONTACTS, GOLD PLATED SHELL.
- MOLDED 45P PVC BLACK(BK).MOLD NO:P1.USB-AM01;P2.UMBM-01
- PACKING:EACH CABLE IN A ZIP-LOCK POLY-BAG.
- 100% ELECTRICAL TESTING.

A01

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	07/25/07			
TITLE				
USB AM TO MINI USB BM				
PART NO.				
USB2-AMMBMG-XX				