


WIRE LIST:

P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SHELL	SHIELD	SHELL

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
USB2-AMPAF-01	01	300	+15/-0
USB2-AMPAF-03	03	900	+50/-0
USB2-AMPAF-06	06	1800	+75/-0

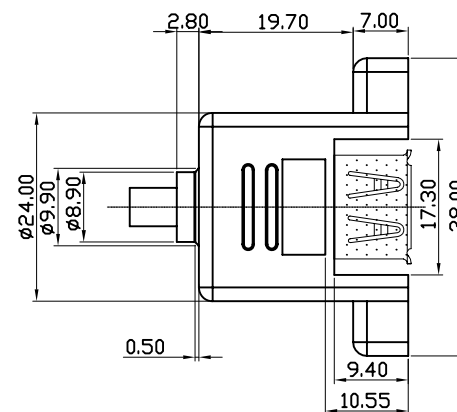

NOTE:

- CABLE: UL2725 USB 2.0 REV CABLE.(28AWG\*1PAIR+ 20AWG\*2C),AL-FOIL AND BRAID SHIELDED(A-MALLOY) WITH A DRAIN WIRE(BARE COPPER),PVC JACKET BLACK OD:4.8±0.15MM.
- CONNECTOR:P1: USB A TYPE MALE, SOLDED TYPE, WHITE PBT INSULATIPON,GOLD PLATED CONTACTS, NICKEL PLATED SHELL.  
P2 :USB A TYPE FEMALE, SOLDED TYPE,WHITE PBT INSULATIPON,GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- NUT:M3.0 ø5.5\*2.4MM NICKEL PLATED
- HOOD:P1:MOLDED 45P BLACK PVC,P2:MOLDED 25P BLACK PVC.
- MOLD NO.: USB-AM01,USB-AF03.
- CABLE ASS'Y MUST PASS CONTINUITY TEST.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/21/10			
TITLE	USB A M TO USB A F			
PART NO.	USB2-AMPAF-XX			