



P/N	XX(FT)	L(MM)	TOLERANCE(MM)
USB2-MBMF-03	03	914	+50/-0
USB2-MBMF-06	06	1829	+75/-0
USB2-MBMF-10	10	3048	+75/-0
USB2-MBMF-15	15	4572	+75/-0

PIN OUT :

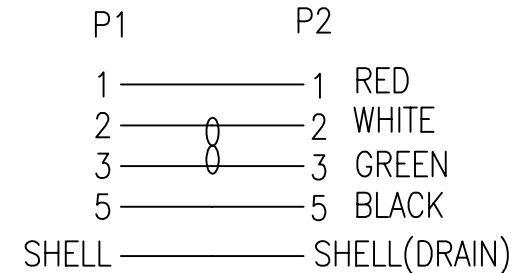

NOTES:

- CABLE: UL2725 USB 2.0 REV CABLE.(28AWG\*1PAIR + 28AWG X 2C), AL-FOIL AND BRAID SHIELDED(A-MALLOY) WITH A DRAIN WIRE(28AWG BARE COPPER),BLACK PVC JACKET, OD:0.15±0.004”(3.8±0.1mm).
- CONNECTOR: P1:MINI USB B TYPE 5P MALE, SOLDER TYPE, BLACK PBT INSULATION, GOLD PLATED CONTACTS, GOLD PLATED SHELL. P2:MINI USB B TYPE 5P FEMALE, SOLDER TYPE, BLACK PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
- MOLDED 45P PVC BLACK(BK).
- PACKING:EACH CABLE IN A ZIP-LOCK POLY-BAG.
- 100% ELECTRICAL TESTING.
- MOLD NO.:UMBM-01, UMBF-01, COVER-UMBF.

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	10/11/10			
TITLE				
MINI USB BM TO MINI USB BF				
PART NO.				
USB2-MBMF-XX				