



| P/N | XX(FT) | L(MM) | TOLERANCE(MM) |
|--------------|--------|-------|---------------|
| USB2-MBMF-03 | 03 | 914 | +50/-0 |
| USB2-MBMF-06 | 06 | 1829 | +75/-0 |
| USB2-MBMF-10 | 10 | 3048 | +75/-0 |

PIN OUT :

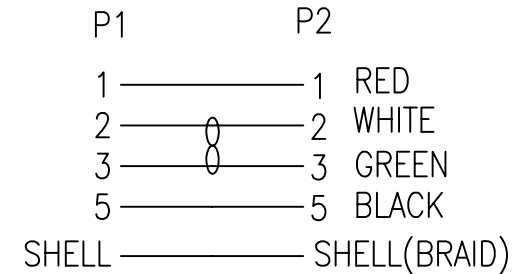

NOTES:

1. CABLE: UL2725 2.0 REV 28AWG*1PAIR+28AWGX2C,AL/MY+BRAID+DRAIN(28AWG), BLACK(BK) PVC JACKET, OD:0.15±0.004”(3.8±0.1mm).
2. CONNECTOR: P1:MINI USB B TYPE 5P MALE, SOLDER TYPE, BLACK PBT INSULATION, GOLD PLATED CONTACTS, GOLD PLATED SHELL.
P2:MINI USB B TYPE 5P FEMALE, SOLDER TYPE, BLACK PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.
3. MOLDED 45P PVC BLACK(BK).
4. PACKING:EACH CABLE IN A ZIP-LOCK POLY-BAG.
5. 100% ELECTRICAL TESTING.
6. MOLD NO.:UMBM-01, UMBF-01, COVER-UMBF.

| | | | | |
|-------------------------------------|----------|---------|-----|---|
| NET MECHANISM Corp | | | | |
| www.cabling-ol.net | | | | |
| SCALE | NONE | | REV | A |
| UNIT | MM | | | |
| SHEET | 1/1 | DWG NO. | | |
| DATE | 01/10/07 | | | |
| TITLE MINI USB BM TO MINI USB BF | | | | |
| PART NO. USB2-MBMF-XX | | | | |