



P/N	X(M)	L(MM)	TOLERANCE(MM)
USB2-R3-AMBMG-010	1	1000	+75/-0
USB2-R3-AMBMG-020	2	2000	+75/-0
USB2-R3-AMBMG-030	3	3000	+75/-0
USB2-R3-AMBMG-050	5	5000	+150/-0

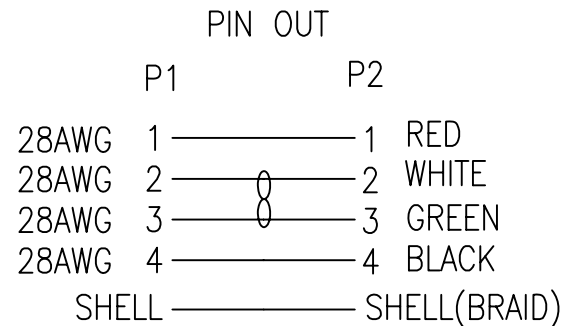

- NOTES:
1. CABLE: UL2725 USB 2.0 REV CABLE.(28AWG*1PAIR + 28AWG X 2C), AL-FOIL AND BRAID SHIELDED WITH A DRAIN WIRE(28AWG), BLACK(BK) PVC JACKET, OD:3.0±0.15mm.
 2. CONNECTOR: P1: USB A TYPE MALE, SOLDER TYPE, WHITE PBT INSULATION, GOLD PLATED CONTACTS, GOLD PLATED SHELL.
P2: USB B TYPE MALE, SOLDER TYPE, WHITE PBT INSULATION, GOLD PLATED CONTACTS, GOLD PLATED SHELL.
 3. HOOD: MOLDED 45P PVC BLACK(BK) PVC.
 4. MOLDED NO.:P1:USB-AM01;P2:USB-BM01.
 5. PACKING:EACH CABLE IN A ZIP-LOCK POLY-BAG.
 6. 100% ELECTRICAL TESTING.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/20/11			
TITLE USB AM TO USB BM				
PART NO. USB2-R3-AMBMG-XXX				