



PIN OUT

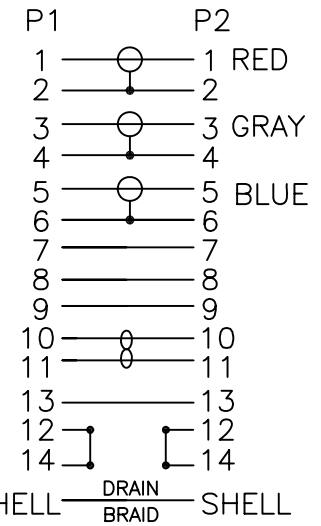

P/N	X(M)	L(MM)	TOLERANCE(MM)
VD-DD-01	1	1000	+75/-0
VD-DD-02	2	2000	+75/-0
VD-DD-03	3	3000	+75/-0
VD-DD-05	5	5000	+150/-0
VD-DD-10	10	10000	+150/-0
VD-DD-15	15	15000	+300/-0
VD-DD-20	20	20000	+300/-0
VD-DD-30	30	30000	+300/-0

NOTE:

1. MINI R.G.B CABLE:[(32AWG X 3COAX(OFC), EACH COAX SPIRAL SHIELDED) + (30AWG X 5C,OFC)+(30AWG X 2PAIRS,OFC)], AL-FOIL AND BRAID(85% min) SHIELDED WITH DRAIN WIRE, UL20276, BLACK MATT PVC JACKET, $\phi 5.0 \pm 0.15$ mm.
2. CONNECTOR: P1 & P2: HALF PITCH 14PIN CENTRONICS MALE, PIN:GOLD PLATED,SHELL:GOLD PLATED,SOLDER TYPE,BLACK HOOD,OD:6MM.
3. PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	c
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	09/29/08			
TITLE HPCN14M TO HPCN14M				
PART NO. VD-DD-XX				