

NOTE:

1. CABLE: UL2919 28AWG*2COAX(UL1354 75ohm)+AL-FOIL SHIELDED WITH DRAIN WIRE +BRAID SHIELDED+BLACK PVC JACKET. OD:7.0±0.15mm.
2. CONNECTOR: P1 & P2: MINI DIN 4PIN MALE: SOLDER TYPE, GOLD FLASH CONTACTS.
3. SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE BRAID.
4. ALL HOOD: MOLDED BLACK PVC.
5. TESTING:100% ELECTRICAL TESTING.

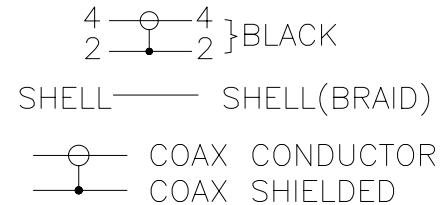



CHART:

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
VD-SVMSVM-03	03	914	+50/-0
VD-SVMSVM-06	06	1829	+75/-0
VD-SVMSVM-12	12	3658	+75/-0

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	11/13/04			
TITLE				
MD4/M TO MD4/M				
PART NO.				
VD-SVMSVM-XX				