


P/N	L(M)	L(MM)	T(MM)
HWCB-VGA-05	5	5000	+150/-0
HWCB-VGA-07	7	7000	+150/-0
HWCB-VGA-10	10	10000	+150/-0
HWCB-VGA-15	15	15000	+300/-0
HWCB-VGA-20	20	20000	+300/-0
HWCB-VGA-30	30	30000	+300/-0
HWCB-VGA-45	45	45000	+300/-0

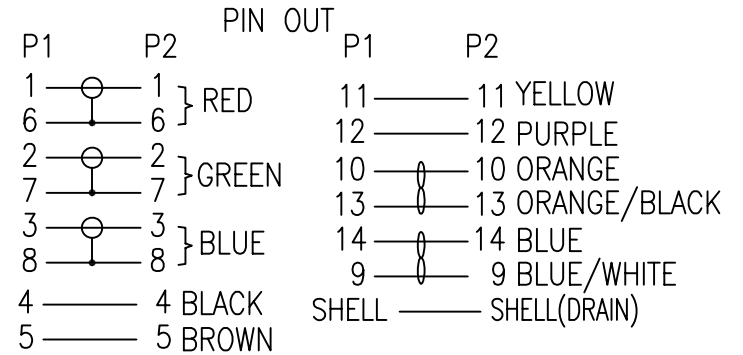

NOTE:

- CABLE: [(28AWG X 3COAX, EACH COAX SPIRAL SHIELDED, 75Ω, UL1354) + (28AWG X 4C) + (28AWG X 2PAIRS)], AL-FOIL AND BRAID(65% A-MALLOY) SHIELDED WITH DRAIN WIRE(BARE COPPER), UL2919,BLACK PVC JACKET, SLOT  $\varnothing 9.0 \pm 0.15\text{mm}$ .
- CONNECTOR: P1 & P2: DIN 14P FEMALE, NICKEL PLATED CONTACTS AND SHELL,
- SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE DRAIN.
- DIN CAP:BRASS,NICKEL PLATED.
- ALL HOOD: MOLDED 45P BLACK PVC.
- TESTING: 100% ELECTRICAL TEST .
- PACKING: EACH CABLE IN A ZIP-LOCK POLY-BAG.
- MOLD NO.: D14F-N01, D14F-02.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	11/30/10			
TITLE	DIN 14/F TO DIN 14/F			
PART NO.	HWCB-VGA-XX			