


WIRE CONNECTION

P1	P2	COLOR
1	2	WHITE
3	1	BROWN
2	3	DRAIN
4	10	WHITE
6	9	RED
5	11	DRAIN
7	18	WHITE
9	17	GREEN
8	19	DRAIN
10	23	WHITE
12	24	BLUE
11	22	DRAIN
15	6	RED
16	7	WHITE
17	15	YELLOW
18	14	ORANGE
19	16	PURPLE
RED	13	BLUE
WHITE	14	GREEN
SPIRAL SHELL	SHELL	DRAIN

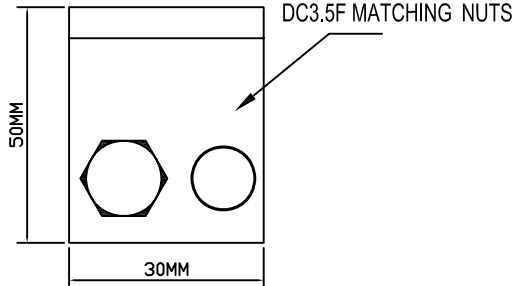

NOTE:

- CABLE: High speed HDMI® CABLE UL20276 (28AWG*1P+AL+D+MYLAR)*4C+ 28AWG*1P+28AWG*5C+AL/MY+DRAIN(BARE COPPER)+BRAID(A-M ALLOY) JACKET COLOR:BLACK OD:6.5±0.15mm.
CABLE2:NON UL, 26AWG*2C+SPIRAL SHIELD,BLACK PVC JACK,OD3.0±0.15mm.
- CONNECTOR: P1: DIN 19P MALE, SOLDER TYPE, TINNED PLATED CONTACTS, INSULATION: BLACK, NICKEL PLATED SHELL, LOCKER TYPE.
P2: DVI 24+5 FEMALE, PIN: G/F, INSULATION WHITE, NICKEL PLATED SHELL. WITH METAL HEX NUT.
P3: DC3.5mm STEREO JACK, NICKEL PLATED SHELL, WITH NUT.
- SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 100% CONTACT TO CONNECTOR SHELL.
P1: COPPER FOIL TAPE 360° SOLDER; P2: COPPER FOIL TAPE SOLDER TO DRAIN.
- MOLDING BLACK 45 PVC.
- TEST: 100% ELECTRICAL TEST.
- MOLD NO.:D14M-N01,D14M-02.DVIF-110-01,DVIF-110-N01,RCA-03,RCA-N03.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	06/15/11			
TITLE	DIN19M TO DVI24+5F			
PART NO.	SICC-DVID-35F-130			