
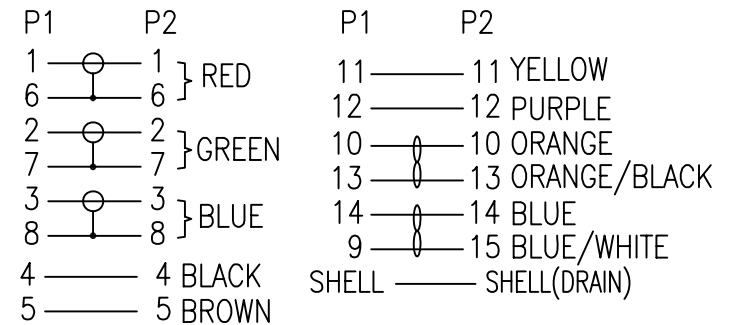


NOTE:

1. CABLE: [(28AWG X 3COAX, EACH COAX SPIRAL SHIELDED, 75Ω, UL1354) + (28AWG X 4C) + (28AWG X 2PAIRS)], AL-FOIL AND BRAID(65% A-MALLOY) SHIELDED WITH DRAIN WIRE(BARE COPPER), UL2919,BLACK PVC JACKET, SLOT  $\varnothing 9.0 \pm 0.15\text{mm}$ .
2. CONNECTOR:  
 P1: DIN 14P MALE, NICKEL PLATED CONTACTS AND SHELL, LOCKER TYPE.  
 P2: HIGH DENSITY D-SUB 15PIN FEMALE: SOLDER TYPE, GOLD FLASH CONTACTS, NICKEL PLATED SHELL.
3. METAL HEX NUT.
4. SHIELDED: COPPER FOIL TAPE COVER PREMOLD AND 360° SOLDER TO CONNECTOR SHELL AND CABLE DRAIN.
5. MOLDED 45P BLACK PVC.
6. TESTING: 100% ELECTRICAL TEST.
7. MOLD NO.:D14M-N01, D14M-02, HD15F-110-01, HD15F-110-N01.

PIN OUT



NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	06/16/11			
TITLE DIN 14/M TO HD15/F				
PART NO. SICC-HD15F-130				