
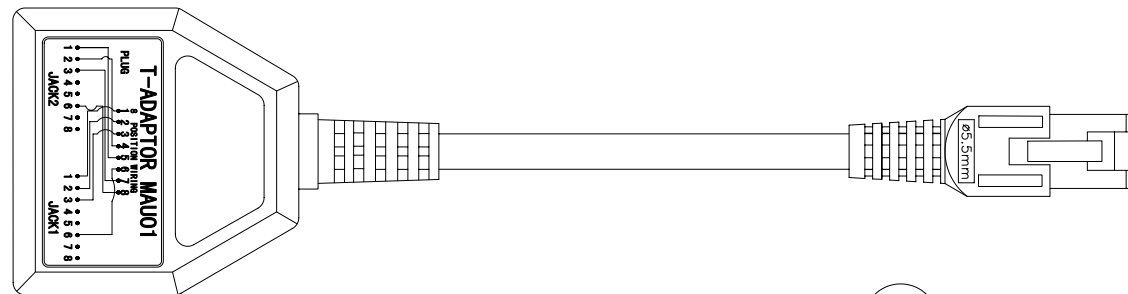


**BOTTOM VIEW**

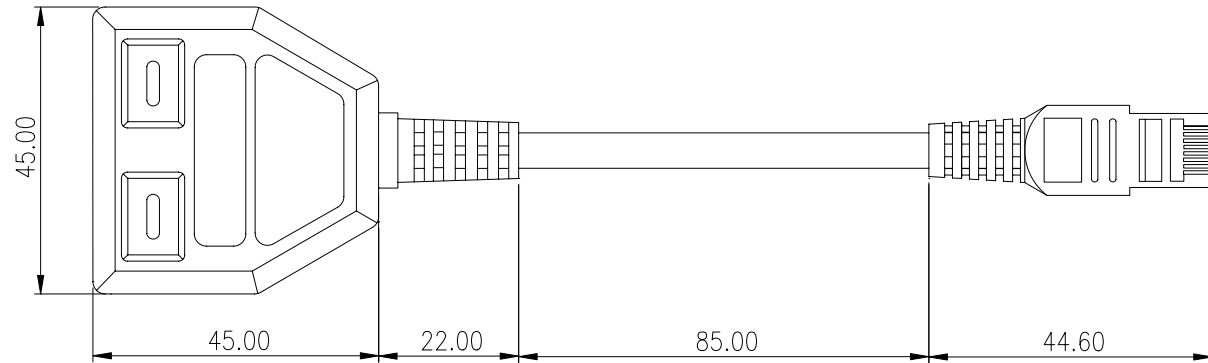

C **UL** US LISTED

**ENCLOSURE: 100N PO (BLUE) X 2**  
**100N PO (GREEN) X 2**

**MATERIAL**

Housing:ABS,UL94V-0  
 Spring Wire:Phosper Bronze with 50u  
 "Gold over 100u"Nickel undercoat  
 Temperature:-40C~68C  
 Humidity:10%~90%RH  
 Modular jack:750 mating cycles

**ELECTRICAL:**

Current rating:1.5Amps  
 Insulation resistance:500M0hm  
 Contact resistance:20M0hm  
 DC resistanc:0.10hm  
 Dielectric withstanding voltage:1000v

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE	⊕	REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	11/13/04			
TITLE				
C-001-1				
PART NO.				
AC5-T				