










Wire Cap

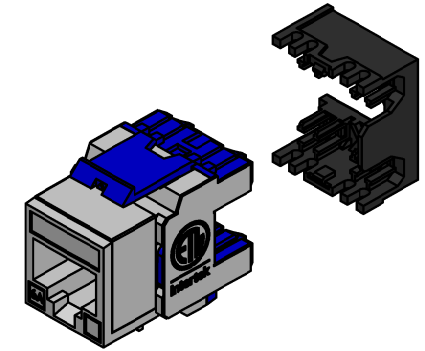

Detail View D
Scale 2 : 1



Material

- Housing: ABS UL94V-0 flame retardancy
- Spring Wire: Phosphor bronze 0.35t, plated with 50u" gold at contact area over 60u" nickel undercoat
- PCB: FR4
- IDC Terminals: Phosphor bronze 0.5t, plated with 100u" nickel
- IDC Block: High-impact Polycarbonate UL94V-2 flame retardancy

Solid Wire Range

- Conductor Diameters: 24AWG - 22AWG
- Insulation Diameters: 0.8mm - 1.1mm
- Cable Diameters: 5mm - 9mm

RoHS



Intertek

ETL Verified to ANSI/TIA-568-C.2
Category 6A Connecting Hardware

DRAWN BY Nick Liu		Description KHA TIA-C6A Keystone Jack	
APPROVED BY Kevin Wu		DWG. NO. 3013AKHA6AWH	
DIMENSIONS ARE MM [IN] TOLERANCES:		REV.	
-20 ±0.1	-50 ±0.15	~150 ±0.2	150- ±0.3
ANGLE ±1°		CUSTOMER PARTS NO.	
3rd Angle Projection		DATE 2015/10/05	SCALE 1:1
		SHEET 5/7	

REV.	DESCRIPTION	DATE