


MATERIAL

Housing: High-impact PC resin, UL 94 V-0 rated
Jack Contacts: Phosphor bronze flat wire, plated with 1.27 μm (50 μin) thick hard gold over nickel underplate
Contact Holder: High-impact ABS resin, UL 94 V-0 rated
PCB: FR4
RoHS 2 compliant

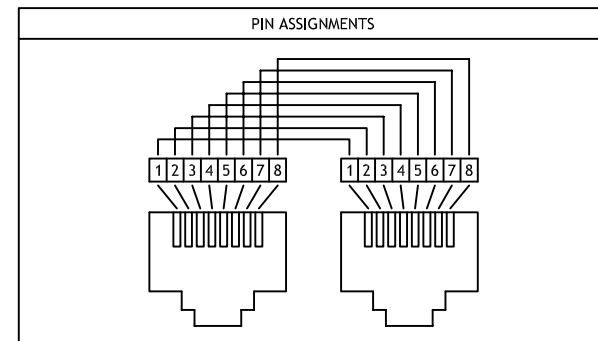

DRAWN BY Kihai Lee		PART NO. 3013AMIYQF6A		VER. 2
APPROVED BY Kevin Wu		CUSTOMER P/N.		
UNIT: mm [inch] TOLERANCES:		DATE 2019.05.21	SCALE X	SHEET 1/1
~20 ± 0.2	~50 ± 0.4	~150 ± 0.5	150~ ± 1.5	ANGLE $\pm 2^\circ$

2	Add pin assignment	2019.05.21
1	First edition	2014.09.09
REV.	DESCRIPTION	DATE