


MATERIAL
 Housing: PC resin, UL 94 V-0 rated
 Jack Contacts: Phosphor bronze flat wire, plated with 1.27 μm (50 μ") thick hard gold over nickel underplate
 Contact Holder: ABS resin, UL 94 V-0 rated
 PCB: FR4
 RoHS 2 compliant

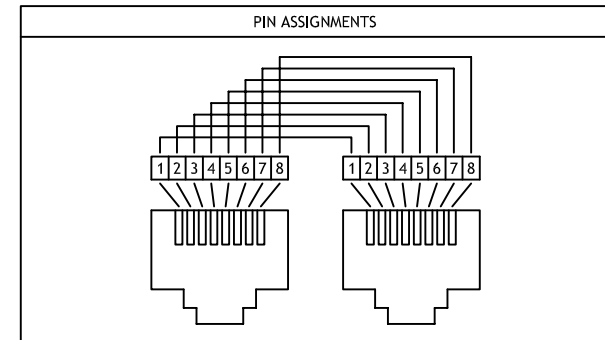

DRAWN BY Kihai Lee		PART NO. 3013AMIYQF6		VER. 2
APPROVED BY Kevin Wu		CUSTOMER P/N.		
UNIT: mm [inch] TOLERANCES:		DATE 2019.05.21		
-20 ±0.2	-50 ±0.4	-150 ±0.5	150- ±1.5	ANGLE ±2°
3rd Angle Projection		SCALE X		SHEET 1/1

REV.	DESCRIPTION	DATE
2	Add pin assignment	2019.05.21
1	First edition	2017.11.17