

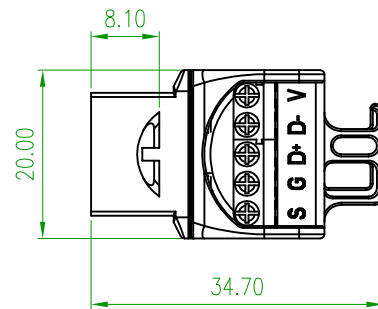
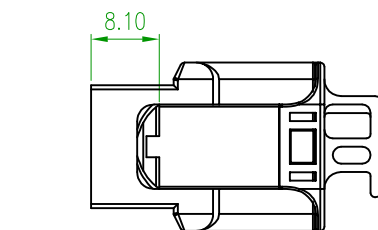
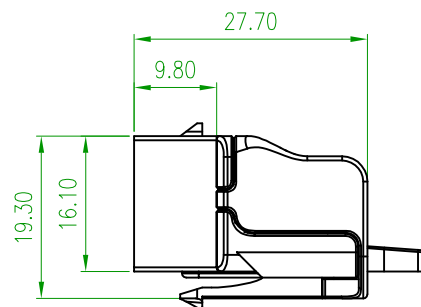


P1



P2

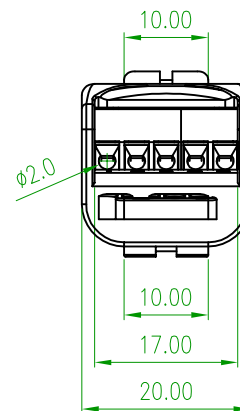

MATERIAL

- Housing: ABS high-impact UL94V-0
 - USB Connector:
 - Housing: Thermoplastic, UL 94 V-0 rated, black
 - Contact: Copper alloy, plated with hard gold 0.76 μm (30 μm)
 - Shell: Stainless steel
 - Screw Terminal
 - Housing: Thermoplastic, UL 94 V-0 rated, green
 - Terminal: Brass(CuZn), plated with tin
 - Screw: Steel zinc plating "-" slot type
 - Wire guard: Stainless steel
- RoHS 2 compliant


PHYSICAL CHARACTERISTICS

Screw terminal wire range
Solid wire (AWG): 16-26
Stranded wire (AWG): 16-26
Torque (Lb-In): 1.7
Screw: M2
Wire strip length: 5-6mm

PIN OUT

P1	P2
1	V
2	D-
3	D+
4	G
SHELL	S

3	Add screw terminal SPEC	2019.07.26	~20	~50	~150	150~	ANGLE
2	Add pin assignment	2019.07.18	±0.2	±0.4	±0.5	±1.5	±2°
1	First edition	2013.09.02	3rd Angle Projection				
REV.	DESCRIPTION	DATE					

DRAWN BY						PART NO. 310USB1NXX			VER. 3	
APPROVED BY										
UNIT: mm [inch] TOLERANCES:										
-20	-50	-150	150~	ANGLE		CUSTOMER P/N.				
±0.2	±0.4	±0.5	±1.5	±2°						
3rd Angle Projection				DATE		SCALE		SHEET		
				2019.07.26		X		1/1		