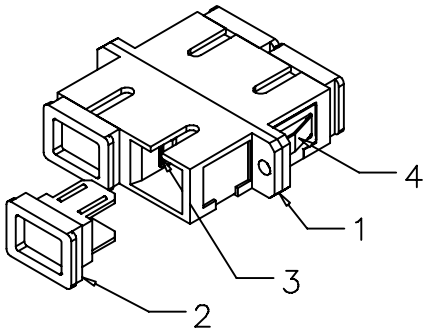

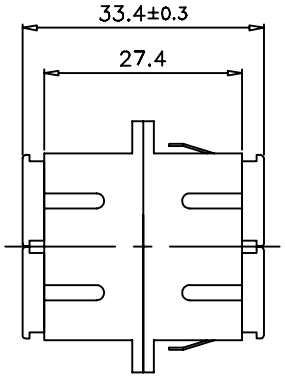

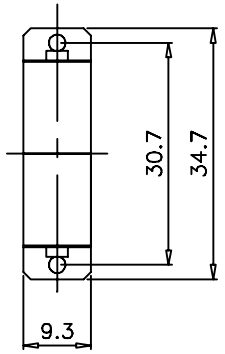



SUGGESTED PANEL CUTOUT



Specification:

Material:

1. SC Housing : PBT, UL 94V-0, Ivory color.
2. SC Dust Cover : PP, Black color.
3. Holder : PBT, UL 94V-0, Ivory color.
4. Clip : STAINLESS.

Adaptor Type :

a. SC to SC Duplex Type, Multimode.
b. Sleeve: Phosphor Bronze.
c. Operation Temperature: -20°C to +70°C.
d. Durability: 500 cycles.
e. Tensile Strength: 10 kgf.
f. Insertion Loss: <0.3 dB.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	1/30/08			
TITLE	Duplex MM SC to SC Adapter			
PART NO.	ADP-DU-SCSC-M			

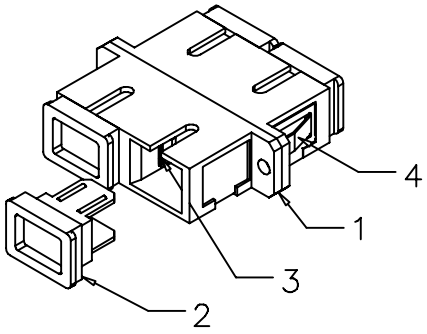

SCALE 1/1



SUGGESTED PANEL CUTOUT

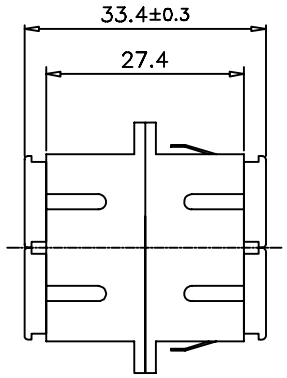

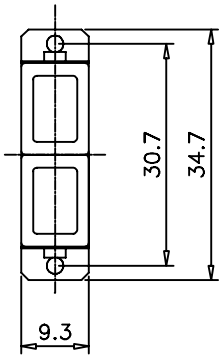



Specification :

Material :
1. SC Housing : PBT, UL 94V-0, Blue color.
2. SC Dust Cover : PP, Black color.
3. Holder : PBT, UL 94V-0, Blue color.
4. Clip : STAINLESS.

Adaptor Type :
a. SC to SC Duplex Type, Singlemode.
b. Sleeve : Zirconia.
c. Operation Temperature : -20°C to +70°C.
d. Durability : 500 cycles.
e. Tensile Strength : 10 kgf.
f. Insertion Loss : <0.2 dB.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	1/30/08			
TITLE	Duplex SM SC to SC Adapter			
PART NO.	ADP-DU-SCSC-S			

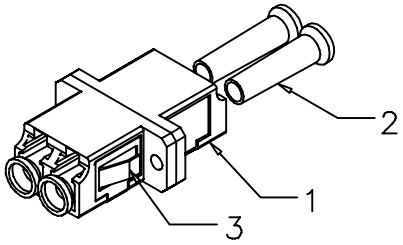

SCALE 1/1



SUGGESTED PANEL CUTOUT





Specification:

Material:

1. Housing: PC UL 94V-0, Ivory Color.
2. Dust Cover: PP3105, White Color.
3. Clip: Stainless.

Performance:

a. LC Duplex Type , Multimode.
b. Sleeve: Phosphor Bronze.
c. Operation Temperature: -20°C to +70°C.
d. Durability: 500 cycles.
e. Tensile Strength: 10 kgf.
f. Insertion Loss: <0.3 dB.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	1/30/08			
TITLE	Duplex MM LC to LC Adapter			
PART NO.	ADP-DU-LCLC-M			

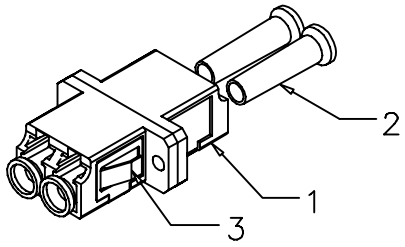

SCALE 1/1



SUGGESTED PANEL CUTOUT





Specification:

Material:

1. Housing: PC UL 94V-0, Blue Color.
2. Dust Cover: PP3105, White Color.
3. Clip: Stainless.

Performance:

a. LC Duplex Type , Singlemode.
b. Sleeve: Zirconia.
c. Operation Temperature: -20°C to +70°C.
d. Durability: 500 cycles.
e. Tensile Strength: 10 kgf.
f. Insertion Loss: <0.2 dB.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	1/30/08			
TITLE	Duplex SM LC to LC Adapter			
PART NO.	ADP-DU-LCLC-S			

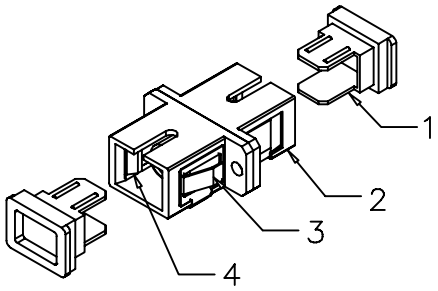

SCALE 1/1



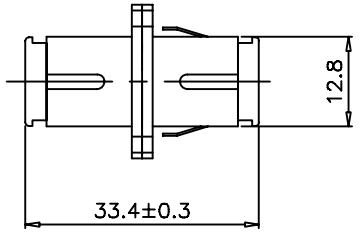







Specification:

Material:

1. SC Dust Cover : PP, Black color.
2. SC Housing : PBT, UL 94V-0, Ivory color.
3. Clip : STAINLESS.
4. Holder : PBT, UL 94V-0, Ivory color.

Adaptor Type :

a. SC to SC Simplex Type, Multimode.
b. Sleeve: Phosphor Bronze.
c. Operation Temperature: -20°C to +70°C.
d. Durability: 500 cycles.
e. Tensile Strength: 10 kgf.
f. Insertion Loss: <0.3 dB.

NET MECHANISM Corp www.cabling-ol.net			
SCALE	NONE	REV	A
UNIT	MM		
SHEET	1/1	DWG NO.	
DATE	1/30/08		
TITLE	Simplex MM SC to SC Adapter		
PART NO.	ADP-SM-SCSC-M		

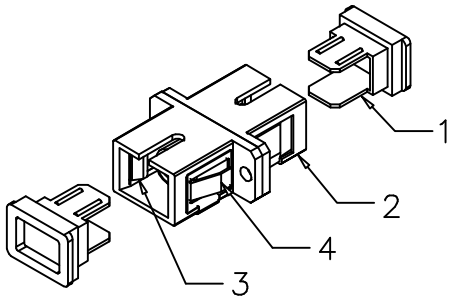

SCALE 1/1



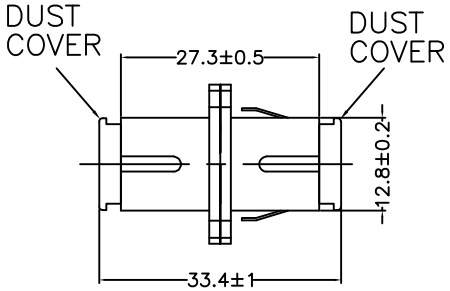





SUGGESTED PANEL CUTOUT

Specification :

Material :
1. SC Dust Cover : PP, Black color.
2. SC Housing : PBT, UL 94V-0, Blue color.
3. Holder : PBT, UL 94V-0, Blue color.
4. Clip : STAINLESS.

Adaptor Type :
a. SC to SC Simplex Type, Singlemode.
b. Sleeve : Zirconia.
c. Operation Temperature : -20°C to +70°C.
d. Durability : 500 cycles.
e. Tensile Strength : 10 kgf.
f. Insertion Loss : <0.2 dB.

NET MECHANISM Corp www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	08/01/13			
TITLE	Simplex SM SC to SC Adapter			
PART NO.	ADP-SM-SCSC-S			