


ISS	SYMBOL	REVISIONS
A1		DESCRIPTION/DATE
A2		由BJ-7048-88BNDG-R 型號轉來 \08/28/06'
		變更 GASKET 材質 \04/09/07'

REMARK: RoHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. PHOSPHOR BRONZE PER QQ-B-750

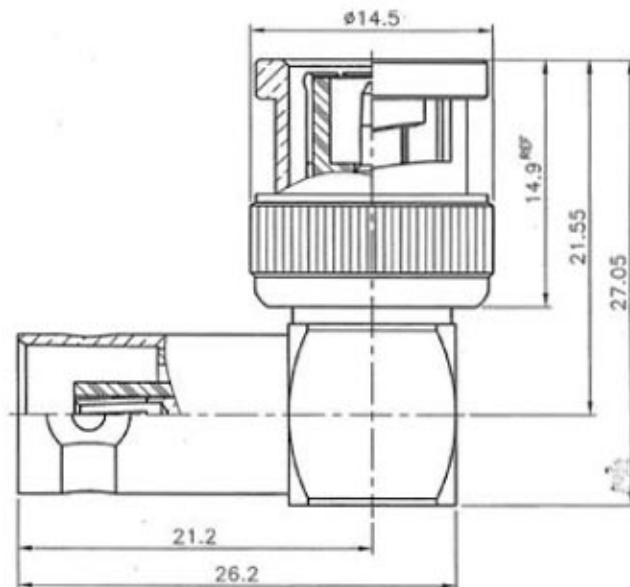

	COVER	NOTE 1	NOTE 2		
	SHELL	NOTE 1	NOTE 2		
	GASKET	SILICONE	RED		
	C RING	SS41	NOTE 2		
	SPRING	SK5	NOTE 2		
	WASHER	SS41	NOTE 2		
	CONTACT PIN	NOTE 1	NOTE 3		
	INSULATOR	DELTRIN	WHITE		
	BODY	NOTE 1	NOTE 2		
	LOCK RING	NOTE 1	NOTE 2		
	CONTACT PIN	NOTE 4	NOTE 3		
	INSULATOR	DELTRIN	WHITE		
	CUBE BODY	NOTE 1	NOTE 2		
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
(一般公差)

0.5-6 = ±0.2
>6-30 = ±0.4
>30-120 = ±0.6
>120-315 = ±1
>315-1000 = ±1.6
ANGLES(角度) = ±5°

PART NO.

APPROVED DATE

CHECKED DATE

DRAWN DATE

TITLE

BNC R/A JACK TO PLUG ADAPTOR

DRAWING NO.

7058NR500CF000B

FILE NO. Z:\NND\7058\NR\500\000\7058NR500CF000B-A2