


ISS	SYMBOL	DESCRIPTION\DATE

REMARK: RoHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. PHOSPHOR BRONZE PER QQ-B-750

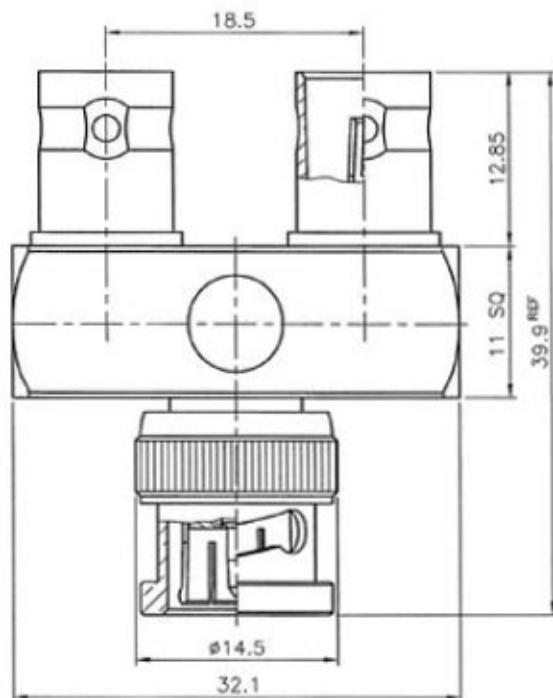

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
	COVER		NOTE 1	NOTE 2	
	LOCK RING		NOTE 1	NOTE 2	
	CONTACT PIN		NOTE 4	NOTE 3	
	INSULATOR	DELIN	WHITE		
	BODY		NOTE 1	NOTE 2	
	INSULATOR	DELIN	WHITE		
	CONTACT PIN		NOTE 1	NOTE 3	
	CONTACT PIN		NOTE 1	NOTE 3	
	INSULATOR	DELIN	WHITE		
	SHELL		NOTE 1	NOTE 2	
	GASKET	SILICONE	RED		
	C RING	SS41	NOTE 2		
	SPRING	SK5	NOTE 2		
	WASHER	SS41	NOTE 2		
	BODY		NOTE 1	NOTE 2	
	CUBE BODY		NOTE 1	NOTE 2	

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差)				APPROVED	DATE
0.5-6 = ±0.2				<i>Mark</i>	09/03/07
6-30 = ±0.4				CHECKED	DATE
30-120 = ±0.6				<i>Mark</i>	09/03/07
120-315 = ±1				DRAWN	DATE
315-1000 = ±1.6				<i>Alvin</i>	09/03/07
ANGLES(角度) = ±5'					

TITLE	BNC "Y" LINK JACK-PLUG-JACK ADAPTOR (75 ohms)
DRAWING NO.	7098NY700CF00B
FILE NO.	Z:\NND\7098\NY\700\000\7098NY700CF00B-A1