


UNC #4-40 Hexscrew


UNC #4-40 Hexnut

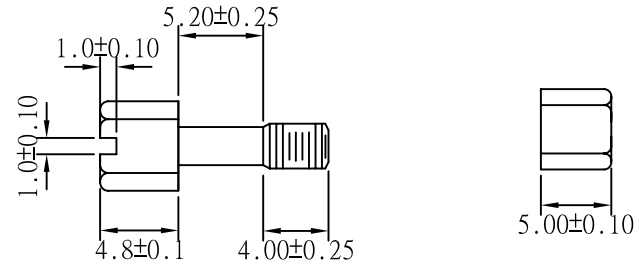

DGC 25 F/F GENDER CHANGER

PIN OUT: 25Female

25Female

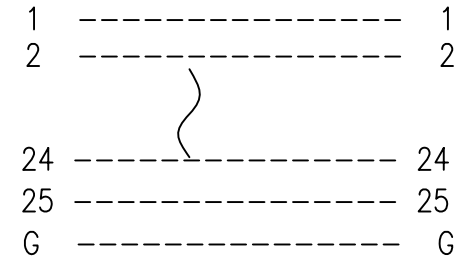

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906

GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000M Ω min at 500V DC

TEMPERATURE: -55°C --- $+105^{\circ}\text{C}$

NET MECHANISM Corp

www.cabling-ol.net

SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	02/27/07	TITLE		
		DB25F/F ADAPTER		
PART NO.		DG-25FF-440		