

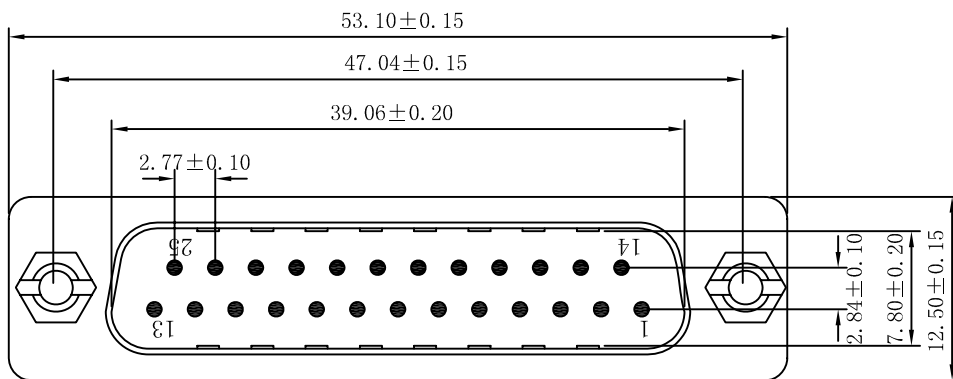


#M-2.6X3.3mm
(THREAD)

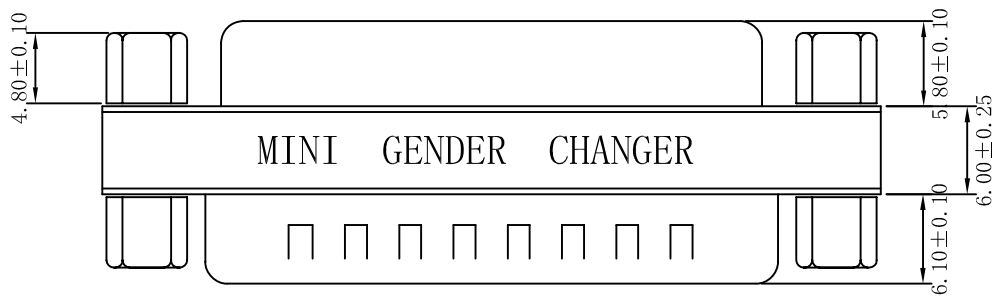

#M-2.6 Hexscrew


M-2.6 Hexnut

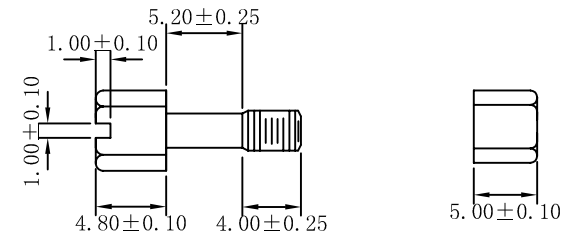

DGC 25 M/F GENDER CHANGER

PIN OUT: 25Male

25Female

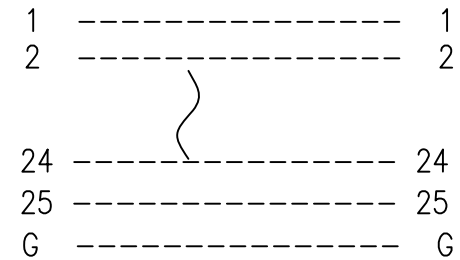

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906

GENDER
CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

CURRENT RATING: 3 AMP


DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000M Ω min at 500V DC

TEMPERATURE: -55°C --- +105°C

NET MECHANISM Corp

www.cabling-ol.net

SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	08/18/06	TITLE		
		DB25 M/F ADAPTER		
PART NO.		DG-25MF-M26		